

SERIES 1501 AIR SHEET NF 48-16 EDITION 3

POPULATED PLACES

Over 100,000 SAIGON
50,000 to 100,000 HAI PHONG
10,000 to 50,000 Nam Dinh
2,000 to 10,000 Ha Dong
Less than 2,000 Robus

ROADS
Dual highway
All weather, hard surface
More than two lanes wide
Two lanes wide
One lane wide

RAILROADS
Normal gauge, single track 1.44m (4'8 1/2") Double track
Narrow gauge

BOUNDARIES
International
First-order administrative

OTHER FEATURES
Area name
Mine or quarry
Campsite, Ruins, Watermill
School, Church, Landmark

VEGETATION
Woods, brushwood, Scattered trees
Cleared, vineyard, Scrub

HYDROGRAPHY
Rocks, uncovering or awash
Exposed wreck
Limit of danger, Reef
Farside flat

TERRAIN ELEVATIONS
Spot elevation, normal, critical
HIGHEST KNOWN ELEVATION IS 1663 feet at the following coordinates:
Geographic: 21°01'N, 106°55'E
Grid: 09 11

AERODROMES (Military or Civil)
EDNA/50/1
Runway pattern known
Field limits and runway pattern unknown

RADIO FACILITIES
VOR VORTAC
TACAN VOR/DME
RADIO RANGE LF/MF
MULTIPLE RADIO FACILITIES

CONTROLLED AIRSPACE
ADIZ
ATLANTIC ADIZ

VISUAL AIDS AND OBSTRUCTIONS
Obstruction
1108-Elevation of obstruction top, above sea level
(259)-Elevation of obstruction top, above ground level
Group obstruction

Radio facility obstruction
Power transmission line
Visual ground sign
Aero light, Marine light

CAUTION
Vertical obstructions, including powerlines, have been omitted from the most reliable sources available. However, there is no assurance that all obstructions, or their locations or heights are exact.

CAUTION
AIR INFORMATION CURRENT THROUGH 5 AUGUST 1992
Consult NOTAMS and Flight Information Publications for the latest air information; the DMA Aeronautical Chart Updating Manual or MOD (U.K.) Aeronautical Chart Amendment document, for other chart revision information.

MAGNETIC VARIATION FOR 1990 IS APPROXIMATELY 1° WEST OVER THE ENTIRE AREA. (Annual rate of change, 1' increase)

ATTENTION
THIS CHART CONTAINS MAXIMUM ELEVATION FIGURES (MEF)
The Maximum Elevation Figures shown in quadrangles bounded by ticked lines of latitude and longitude are represented by THOUSANDS and HUNDREDS of feet above mean sea level. The MEF is based on information available concerning the highest known features in each quadrangle, including terrain and obstructions (trees, towers, antennas, etc.).
EXAMPLE: 12,500 feet 125

LOCATION DIAGRAM
Boundary Representation is Not Necessarily Authoritative
(DMC INDEX SHOWN IN RED BROWN)

Table with 4 columns: Grid, Country, Grid, Country. Shows neighboring sheets like NF 48-10, NF 48-11, etc.


Prepared and published by the Defense Mapping Agency Hydrographic/Topographic Center, Washington, D.C. 20315. Compiled April 1967, Revised by DMAAC April 1992.

LIMITED DISTRIBUTION
Distribution authorized to the Department of Defense, U.S. DOD contractors and to U.S. Government Agencies supporting DOD functions by authority of the Director, Defense Mapping Agency, 30 May 1980. Other requests shall be referred to Headquarters, DMA, ATTN: SOP, Destroy as "For Official Use Only."

SCALE 1:250,000
HAI PHONG, VIETNAM

SERIES 1501 AIR SHEET NF 48-16 EDITION 3

SERIES 1501 COMPANION SHEET IS EDITION 2

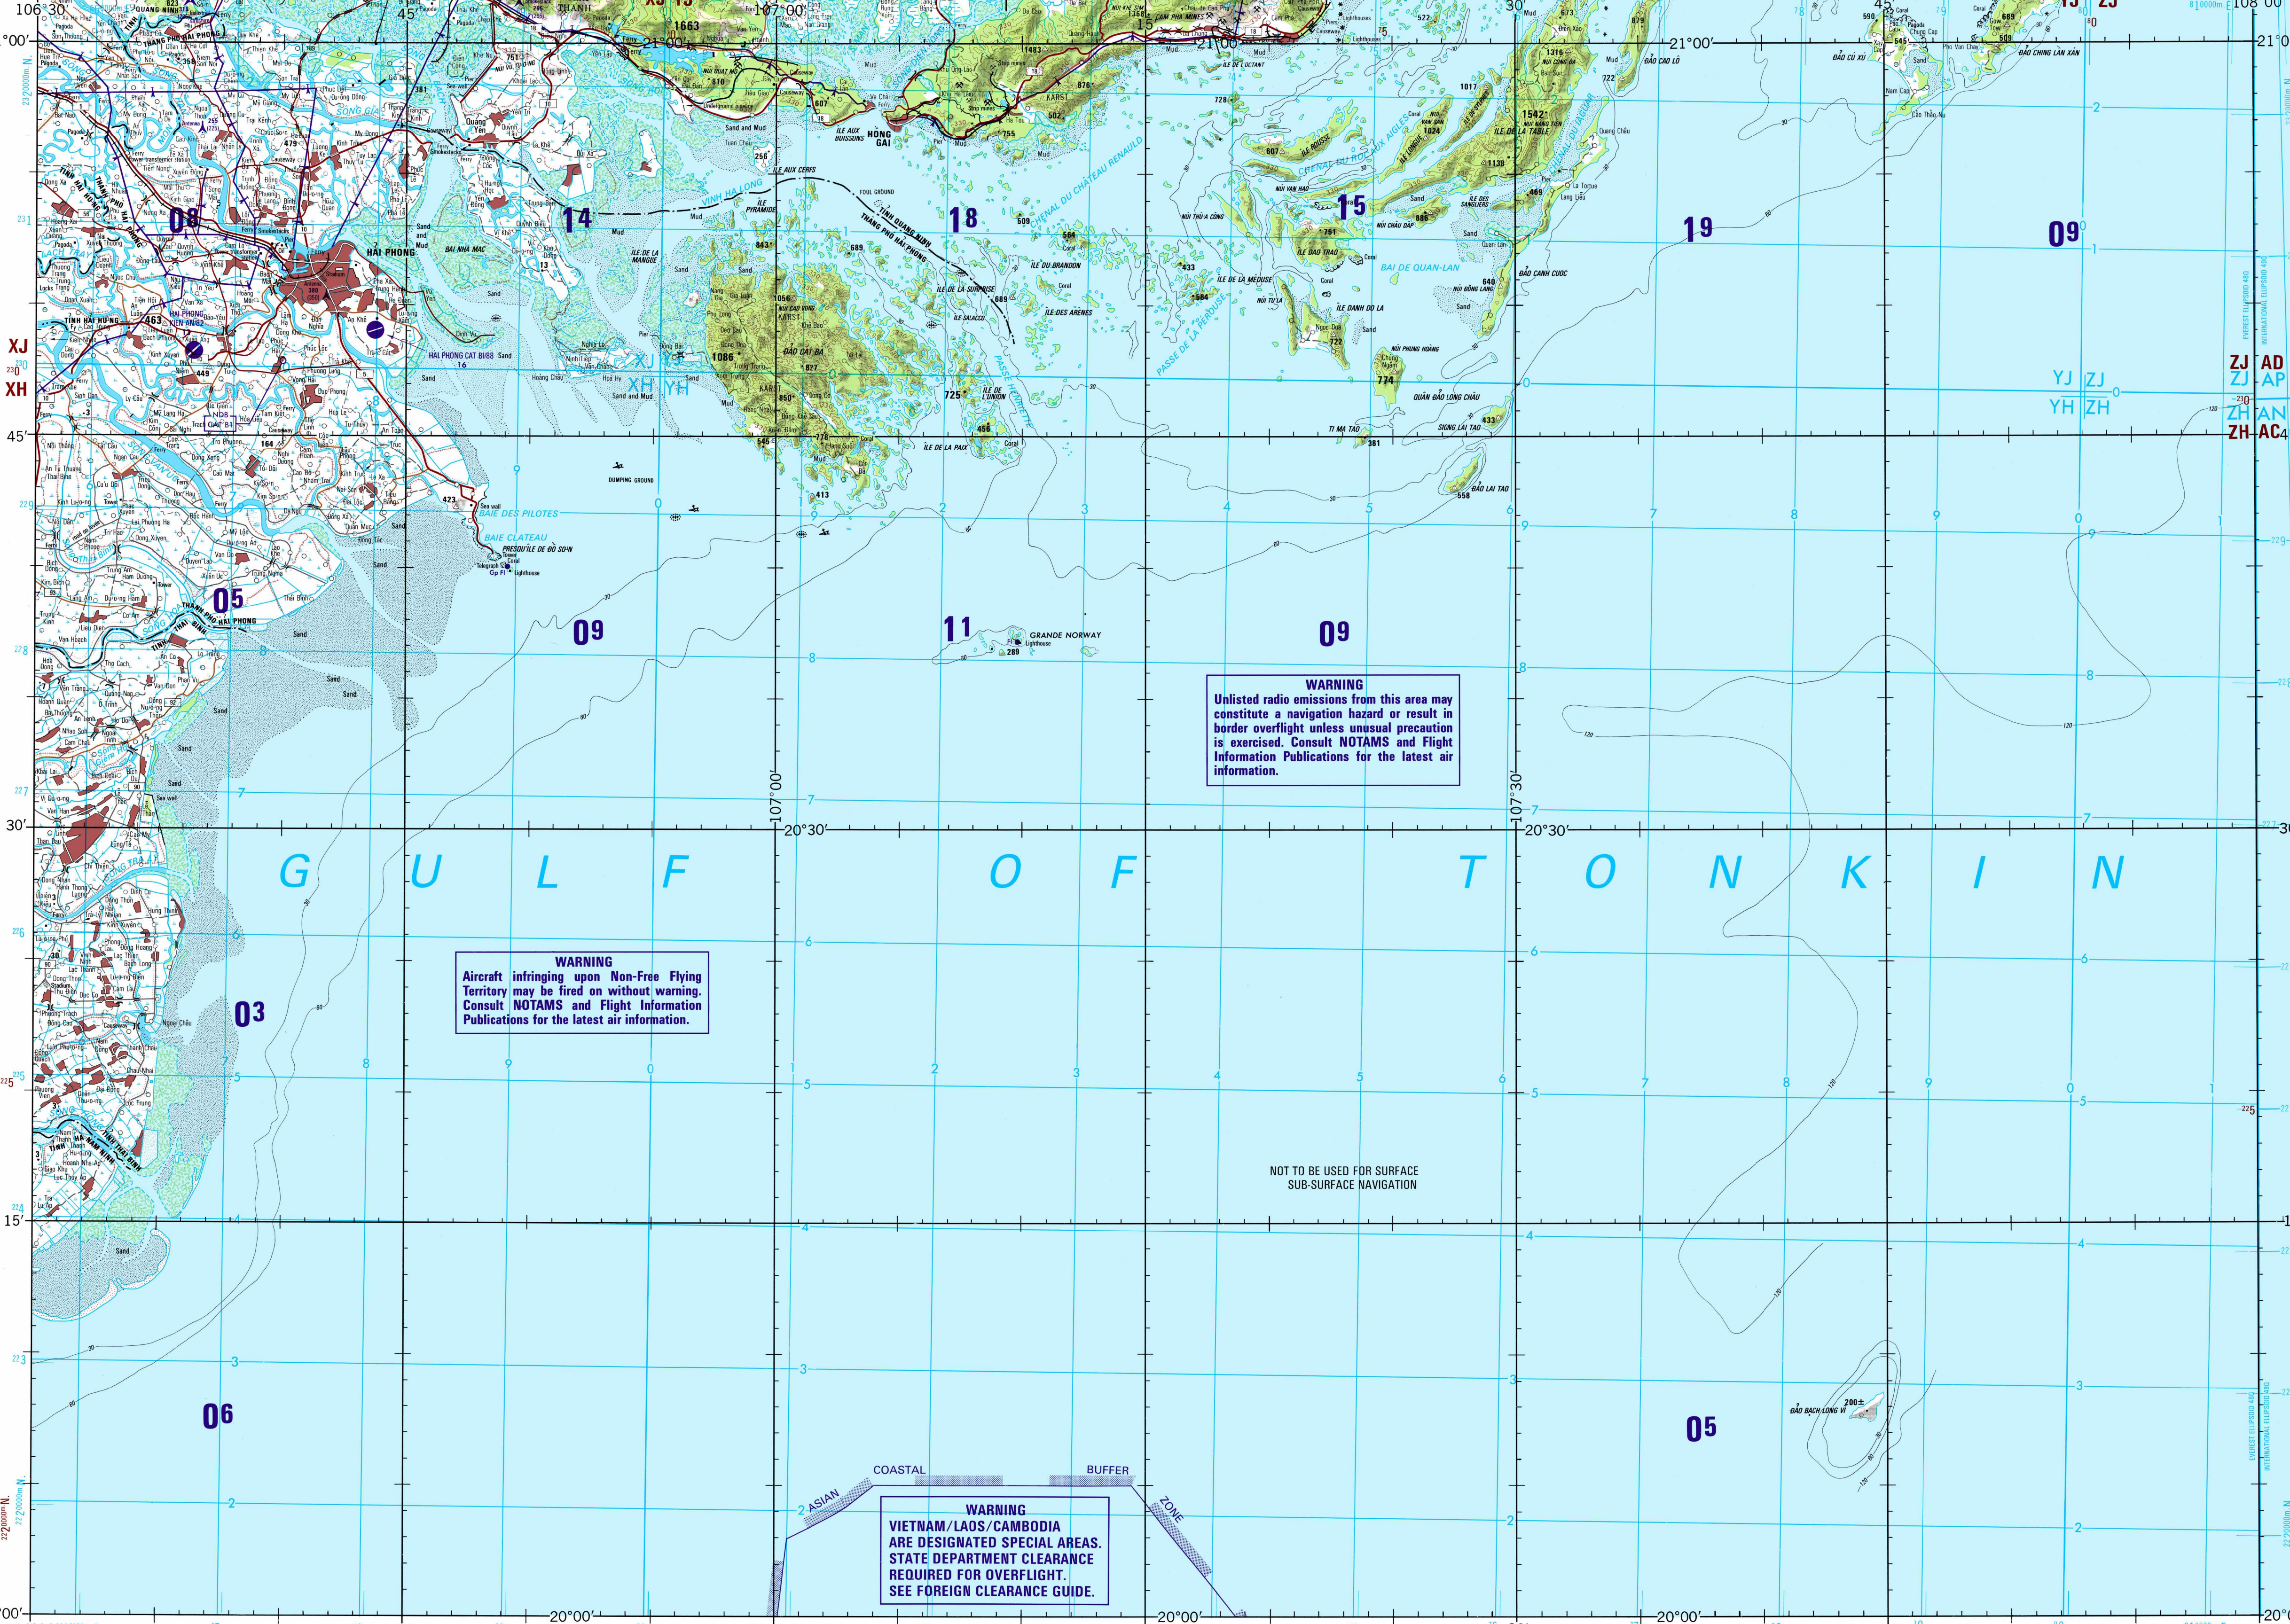

WARNING
Aircraft infringing upon Non-Free Flying Territory may be fired on without warning. Consult NOTAMS and Flight Information Publications for the latest air information.

WARNING
Unlisted radio emissions from this area may constitute a navigation hazard or result in border overflight unless unusual precaution is exercised. Consult NOTAMS and Flight Information Publications for the latest air information.

WARNING
VIETNAM/LAOS/CAMBODIA ARE DESIGNATED SPECIAL AREAS. STATE DEPARTMENT CLEARANCE REQUIRED FOR OVERFLIGHT. SEE FOREIGN CLEARANCE GUIDE.

NOT TO BE USED FOR SURFACE SUB-SURFACE NAVIGATION


CONVERSION OF ELEVATIONS
Table with 2 columns: FEET, METERS. Shows conversion for 1000, 900, 800, 700, 600, 500, 400, 300, 200, 100, 50, 1000, 900, 800, 700, 600, 500, 400, 300, 200, 100, 50.

DMA IS UPDATING THE MILITARY GRID REFERENCE SYSTEM UNTIL ALL ADJACENT AND OVERLAPPING SHEETS ARE CONVERTED. THE NEW GRID VALUES ARE DEPICTED IN RED/BROWN AND THE OLD IN BLUE.
Table with 2 columns: SAMPLE 1000 METER SQUARE, SAMPLE 1000 METER REFERENCE. Shows grid coordinates and values.



GLOSSARY
Table with 2 columns: Feature, Abbreviation. Lists symbols for Bay, Channel, Shoal, Reef, Light, etc.

GEOREF BASIC 15° QUADRANGLE VH



ELEVATION TINTS
Table with 2 columns: FEET, Tint. Shows color coding for elevations: 600, 330, BSL.

RELIABILITY OF THIS GRAPHIC (as determined by standard practice)

Table with 4 columns: PLOTTING ACCURACY 95% ASSURANCE, AREA, AREA, AREA. Shows accuracy data for different areas.

NOTES
Powerlines are shown except within populated place tints. Other obstructions are shown, if they are 200 feet or more above ground level. See caution note. On this graphic a line is generally considered as being 8 feet (2.5 meters) in width. BOUNDARY REPRESENTATION IS NOT NECESSARILY AUTHORITATIVE. ALIGNMENT OF ALL BOUNDARIES IS APPROXIMATE. Road classification should be referred to with caution.

Horizontal Datum: Indian Datum
Vertical Datum: Mean Sea Level
Transverse Mercator Projection