


UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

STATE OF FLORIDA

ALLANTON QUADRANGLE
FLORIDA
7.5 MINUTE SERIES ORTHOPHOTOMAP
(TOPOGRAPHIC-BATHYMETRIC)




CONVERSION
SCALES

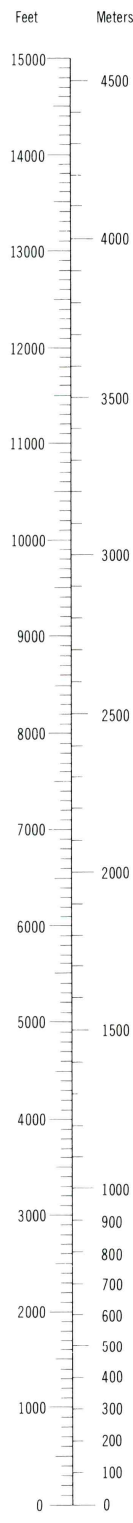

Feet	Meters
1	0.3048
2	0.6096
3	0.9144
4	1.2192
5	1.5240
6	1.8288
7	2.1336
8	2.4384
9	2.7432
10	3.0480

To convert feet to meters
multiply by 0.3048
To convert meters to feet
multiply by 3.2808

1. Dryland
2. Wetlands (May be partially submerged at mean high tide)
3. Exposed at mean low tide




Produced by the United States Geological Survey
and the National Ocean Service
Control by USGS and NOS/NOAA
Orthophotomap prepared from aerial photograph taken
January 23, 1976. Compiled by photogrammetric methods
from aerial photographs taken January 1975
Field checked 1976. Map edited 1982
Supersedes topographic map dated 1956
Bathymetry compiled by National Ocean Service from
tide-coordinated hydrographic surveys
This information is not intended for navigational purposes
Mean low water (dotted) line and mean high water (solid) line
compiled by NOS from tide-coordinated aerial photographs
Apparent shoreline (outer edge of vegetation) shown
by photoimagery
Projection and 1000-meter grid, zone 16: Universal Transverse
Mercator
10,000-foot grid ticks based on Florida coordinate system,
north zone. 1927 North American Datum
The difference between 1927 North American Datum and North
American Datum of 1983 (NAD 83) for 7.5-minute intersections
is given in USGS Bulletin 1875. The NAD 83 is shown by
dashed corner ticks
There may be private inholdings within the boundaries of
the National or State reservations shown on this map



UTM GRID AND 1992 MAGNETIC NORTH
DECLINATION AT CENTER OF SHEET


Survey Number	Survey Date	Survey Scale	Survey Line Spacing (Naut. Miles)
H-6780	1935	1:10,000	01-06
H-6781	1935	1:10,000	02-06

Photoinspected from 1990 source; no major
culture or drainage changes observed
Boundaries and names revised 1992

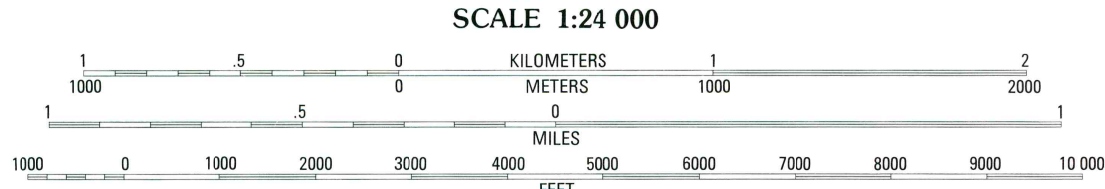

CONTOUR INTERVAL 2 METERS
SUPPLEMENTARY CONTOUR INTERVAL 1 METER
DASHED SUPPLEMENTARY CONTOURS ARE APPROXIMATE
NATIONAL GEODETIC VERTICAL DATUM OF 1929
CONTROL ELEVATIONS SHOWN TO THE NEAREST 0.1 METER
OTHER ELEVATIONS SHOWN TO THE NEAREST 0.5 METER
BATHYMETRIC CONTOUR INTERVAL 1 METER WITH SUPPLEMENTARY
0.5 METER CONTOURS-DATUM IS MEAN LOWER LOW WATER
THE RELATIONSHIP BETWEEN THE TWO DATUMS IS VARIABLE
THE MEAN RANGE OF TIDE IS APPROXIMATELY 0.5 METER

BASE MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
BATHYMETRIC SURVEY DATA COMPLIES WITH INTERNATIONAL HYDROGRAPHIC
ORGANIZATION (IHO) SPECIAL PUBLICATION 44 ACCURACY STANDARDS
AND/OR STANDARDS USED AT THE DATE OF THE SURVEY
FOR SALE BY U. S. GEOLOGICAL SURVEY, DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092
AND NATIONAL OCEAN SERVICE, ROCKVILLE, MARYLAND 20852
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

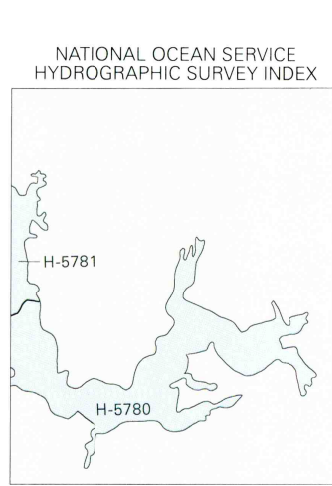

ROAD CLASSIFICATION
Primary highway, hard surface
Secondary highway, hard surface
Trails
Interstate Route
U. S. Route
State Route
Light-duty road, hard or improved surface
Unimproved road

CONTOURS AND ELEVATIONS
IN METERS

ALLANTON, FLA.
30085-A4-TB-024
1982
MINOR REVISION 1992
DMA 3944 III SW-SERIES V8470