
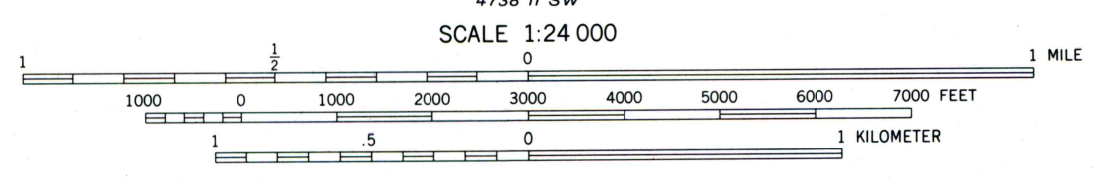


Mapped by U. S. Corps of Engineers
Edited and published by the Geological Survey
Control by NOS/NOAA and USCE

Planimetry in part by photogrammetric methods
from aerial photographs taken 1950
Topography by planetable surveys 1950-1951
Field checked by the Geological Survey 1953

Polyconic projection. 10,000-foot grid ticks based on Florida
coordinate system, east zone. 1000-meter Universal
Transverse Mercator grid ticks, zone 17, shown in blue
To place on the predicted North American Datum 1983 move
the projection lines 33 meters south and 19 meters west
as shown by dashed corner ticks

Certain land lines unsurveyed in T. 37 S.-R. 31 E.,
T. 37 S.-R. 32 E., T. 38 S.-R. 31 E., and T. 38 S.-R. 32 E.



CONTOUR INTERVAL 5 FEET
NATIONAL GEODETIC VERTICAL DATUM OF 1929

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U. S. GEOLOGICAL SURVEY, RESTON, VIRGINIA 22092
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

ROAD CLASSIFICATION

Heavy-duty	4 LANE, 6 LANE	Light-duty
Medium-duty	4 LANE, 6 LANE	Unimproved dirt

U. S. Route (square symbol)
State Route (circle symbol)

Revisions shown in purple and woodland compiled by the
Geological Survey in cooperation with State of Florida agencies
from aerial photographs taken 1980 and other sources.
This information not field checked. Map edited 1983

BRIGHTON NW, FLA.
27081-B2-TF-024

1953
PHOTOREVISED 1983
DMA 4738 II NW - SERIES V847