


CONVERSION SCALES



Feet	Meters
1000	300
2000	600
3000	900
4000	1200
5000	1500
6000	1800
7000	2100
8000	2400
9000	2700
10000	3000
11000	3300
12000	3600
13000	3900
14000	4200
15000	4500
16000	4800
17000	5100
18000	5400
19000	5700
20000	6000
21000	6300
22000	6600
23000	6900
24000	7200
25000	7500
26000	7800
27000	8100
28000	8400
29000	8700
30000	9000
31000	9300
32000	9600
33000	9900
34000	10200
35000	10500
36000	10800
37000	11100
38000	11400
39000	11700
40000	12000
41000	12300
42000	12600
43000	12900
44000	13200
45000	13500
46000	13800
47000	14100
48000	14400
49000	14700
50000	15000
51000	15300
52000	15600
53000	15900
54000	16200
55000	16500
56000	16800
57000	17100
58000	17400
59000	17700
60000	18000
61000	18300
62000	18600
63000	18900
64000	19200
65000	19500
66000	19800
67000	20100
68000	20400
69000	20700
70000	21000
71000	21300
72000	21600
73000	21900
74000	22200
75000	22500
76000	22800
77000	23100
78000	23400
79000	23700
80000	24000
81000	24300
82000	24600
83000	24900
84000	25200
85000	25500
86000	25800
87000	26100
88000	26400
89000	26700
90000	27000
91000	27300
92000	27600
93000	27900
94000	28200
95000	28500
96000	28800
97000	29100
98000	29400
99000	29700
100000	30000

To convert feet to meters multiply by 0.3048  
To convert meters to feet multiply by 3.2808

1. Dryland
2. Wetlands (may be partially submerged at mean high tide)
3. Exposed at mean low tide

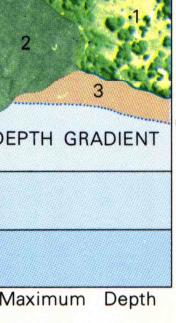


Produced by the United States Geological Survey and the National Ocean Service and the National Ocean Service Control by USGS and NOS/NOAA  
Orthophotomap prepared from aerial photographs taken January 10, 1976. Compiled by photogrammetric methods from aerial photographs taken January 1975. Field checked 1976. Map edited 1982.  
Bathymetry compiled by the National Ocean Service from tide-coordinated hydrographic surveys. This information is not intended for navigational purposes. Mean low water (dotted) line and mean high water (solid) line compiled by NOS from tide-coordinated aerial photographs. Apparent shoreline (outer edge of vegetation) shown by photomicroscopy.  
Projection and 10,000-foot grid ticks: Florida coordinate system, north zone (Lambert conformal conic).  
1000-meter Universal Transverse Mercator grid, zone 16 1927 North American Datum.  
The difference between 1927 North American Datum and North American Datum of 1983 (NAD 83) for 7.5-minute intersections is given in USGS Bulletin 1875. The NAD 83 is shown by dashed corner ticks.  
There may be private inholdings within the boundaries of the National or State reservations shown on this map.  
Photinspected from 1990 source; no major culture or drainage changes observed. Boundaries revised and names verified 1992.

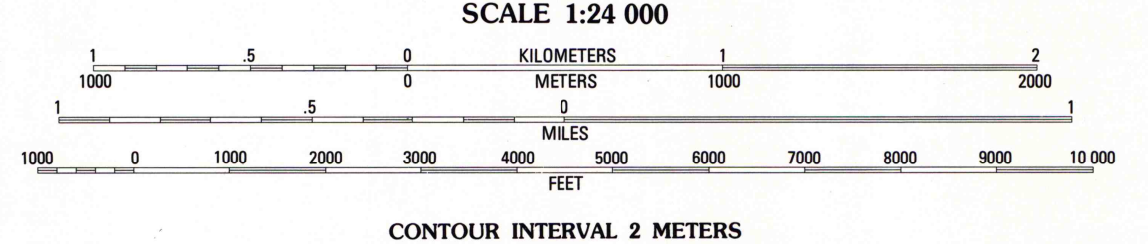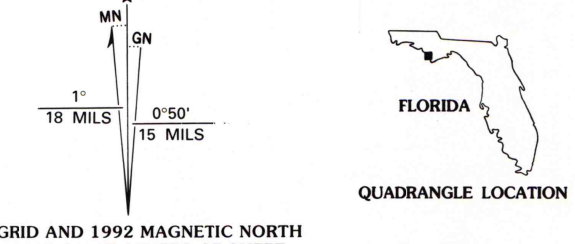

CONTOUR INTERVAL 2 METERS  
SUPPLEMENTARY CONTOUR INTERVAL 1 METER  
NATIONAL GEODETIC VERTICAL DATUM OF 1929  
CONTROL ELEVATIONS SHOWN TO THE NEAREST 0.1 METER  
OTHER ELEVATIONS SHOWN TO THE NEAREST 0.5 METER  
BATHYMETRIC CONTOUR INTERVAL 1 METER WITH SUPPLEMENTARY 0.5 METER CONTOURS—DATUM IS MEAN LOWER LOW WATER  
THE RELATIONSHIP BETWEEN THE TWO DATUMS IS VARIABLE  
THE MEAN RANGE OF TIDE IS APPROXIMATELY 0.4 METER

BASE MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS  
BATHYMETRIC SURVEY DATA COMPLIES WITH INTERNATIONAL HYDROGRAPHIC ORGANIZATION (IHO) SPECIAL PUBLICATION 44 ACCURACY STANDARDS  
AND/OR STANDARDS USED AT THE DATE OF THE SURVEY  
FOR SALE BY U. S. GEOLOGICAL SURVEY  
DENVER, COLORADO 80225; OR RESTON, VIRGINIA 22092  
AND NATIONAL OCEAN SERVICE, ROCKVILLE, MARYLAND 20852  
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

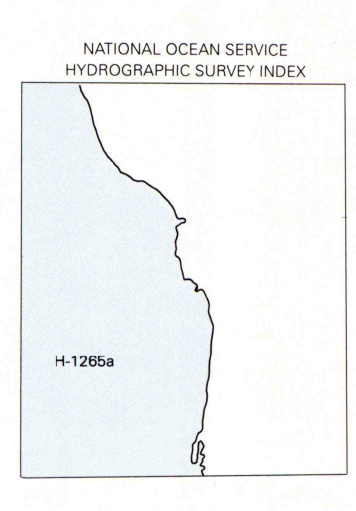

ROAD CLASSIFICATION

Primary highway, hard surface  
Secondary highway, hard surface  
Trails  
Interstate Route  
U. S. Route  
State Route

Light-duty road, hard or improved surface  
Unimproved road

PORT ST. JOE, FLA.  
29085-C3-TB-024  
1982  
MINOR REVISION 1992  
DMA 3943 IV SE-SERIES V8470