


Produced by the United States Geological Survey  
Topography compiled 1952. Planimetry derived from imagery taken 1976. Photosinspected using imagery dated 1994; no major culture or drainage changes observed. Survey control current as of 1978. Boundaries verified 1998.  
North American Datum of 1927 (NAD 27)  
Projection: Florida coordinate system, north zone (Lambert conformal conic)  
10 000-foot ticks: Florida coordinate system, north zone and Alabama coordinate system, east zone  
1000-meter Universal Transverse Mercator grid, zone 16  
North American Datum of 1983 (NAD 83) is shown by dashed corner ticks. The values of the shift between NAD 27 and NAD 83 for 7.5-minute intersections are obtainable from National Geodetic Survey NADCON software

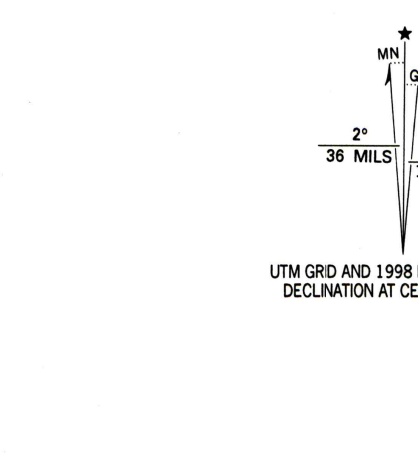

SCALE 1:24 000  
CONTOUR INTERVAL 10 FEET  
NATIONAL GEODETIC VERTICAL DATUM OF 1929  
TO CONVERT FROM FEET TO METERS, MULTIPLY BY 0.3048

ROAD CLASSIFICATION

Primary highway, hard surface	Light-duty road, hard or improved surface
Secondary highway, hard surface	Unimproved road

Legend for road types:  
Interstate Route (red shield)  
U. S. Route (blue shield)  
State Route (white shield)  
County Route (red square)

QUADRANGLE LOCATION

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS  
FOR SALE BY U.S. GEOLOGICAL SURVEY, P.O. BOX 25286, DENVER, COLORADO 80225  
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

SILLES, FLA.-ALA.  
1994  
NIMA 3945 IV NE-SERIES Y847

