



Produced by the United States Geological Survey  
Topography compiled 1954. Planimetry derived from imagery taken 1976. Photoinspected using imagery dated 1994; no major culture or drainage changes observed. Survey control current as of 1978 boundaries, other than corporate, revised 1998  
North American Datum of 1927 (NAD 27)  
Projection: Florida coordinate system, north zone (Lambert conformal conic)  
10 000-foot ticks: Florida coordinate system, north zone and Georgia coordinate system, west zone  
1000-meter Universal Transverse Mercator grid, zone 16  
North American Datum of 1983 (NAD 83) is shown by dashed corner ticks. The values of the shift between NAD 27 and NAD 83 for 7.5-minute intersections are obtainable from National Geodetic Survey NADCON software  
There may be private inholdings within the boundaries of the National or State reservations shown on this map

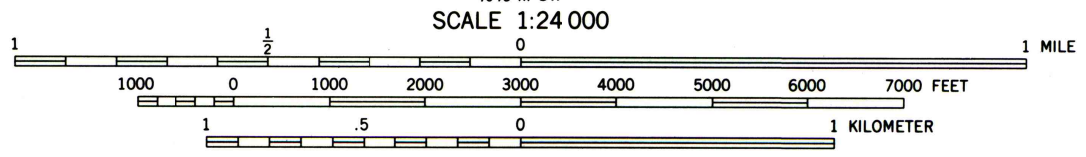

CONTOUR INTERVAL 10 FEET  
NATIONAL GEODETIC VERTICAL DATUM OF 1929  
TO CONVERT FROM FEET TO METERS, MULTIPLY BY 0.3048

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS  
FOR SALE BY U.S. GEOLOGICAL SURVEY, P.O. BOX 25286, DENVER, COLORADO 80225  
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST



ROAD CLASSIFICATION

Primary highway, hard surface	Light-duty road, hard or improved surface
Secondary highway, hard surface	Unimproved road
Interstate Route	U. S. Route
State Route	County Route

SNEADS, FLA.-GA.

1994

NIMA 4045 III NW-SERIES V847

