



CONVERSION SCALES

Feet	Meters
15000	4500
14000	4200
13000	3900
12000	3600
11000	3300
10000	3000
9000	2700
8000	2400
7000	2100
6000	1800
5000	1500
4000	1200
3000	900
2000	600
1000	300
0	0

Feet Meters  
1 3048  
2 6096  
3 9144  
4 12192  
5 15240  
6 18288  
7 21336  
8 24384  
9 27432  
10 30480

To convert feet to meters multiply by .3048  
To convert meters to feet multiply by 3.2808

Produced by the United States Geological Survey  
Control by USGS, NOS/NOAA, and North Carolina Geodetic Survey  
Compiled by photogrammetric methods from aerial photographs taken 1977. Field checked 1979. Map edited 1982  
Projection and 100,000-foot grid ticks: North Carolina coordinate system (Lambert conformal conic)  
1000-meter Universal Transverse Mercator grid, zone 18  
1927 North American Datum  
To place on the predicted North American Datum 1983 move the projection lines 12 meters south and 26 meters west as shown by dashed corner ticks  
Short dashed blue lines indicate elliptical bay outlines visible on aerial photographs  
Fine red dashed lines indicate selected fence and field lines where generally visible on aerial photographs. This information is unchecked

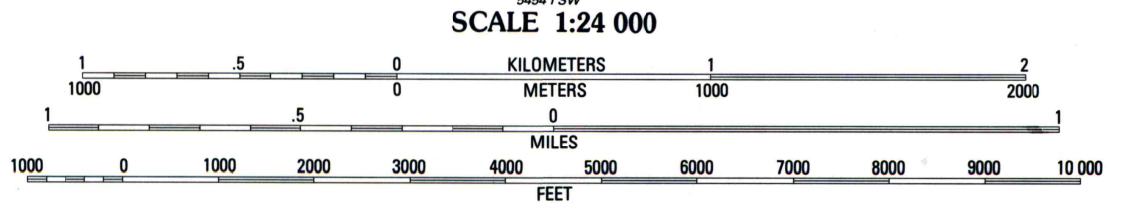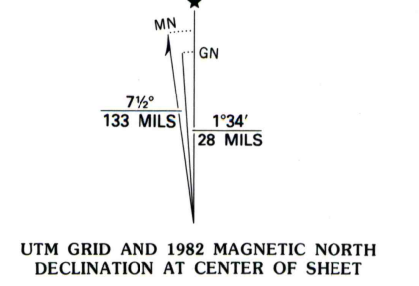

CONTOUR INTERVAL 2 METERS  
NATIONAL GEODETIC VERTICAL DATUM OF 1929  
CONTROL ELEVATIONS SHOWN TO THE NEAREST 0.1 METER  
OTHER ELEVATIONS SHOWN TO THE NEAREST 0.5 METER

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS  
FOR SALE BY U. S. GEOLOGICAL SURVEY, RESTON, VIRGINIA 22092  
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST



ROAD CLASSIFICATION

Primary highway, hard surface	Light-duty road, hard or improved surface
Secondary highway, hard surface	Unimproved road
Interstate Route	U. S. Route
	State Route

SNOW HILL, N. C.  
NW/4 KINSTON 15' QUADRANGLE  
N3522.5 - W7737.5/7.5  
1982  
DMA 5454 1 NW - SERIES V842