


LEGENDA SIGNOS CONVENCIONALES. On this map a lane is considered as being a minimum of 2.5 meters in width. En este mapa se considera que una vía tenga un ancho mínimo de 2.5 metros. Includes legend for roads, railroads, boundaries, and natural features.

GLOSSARY GLOSARIO. Lists geographical terms in English and Spanish such as Caleta, Cerro, Estero, Isla, Lodo, Loma, Playa, etc.

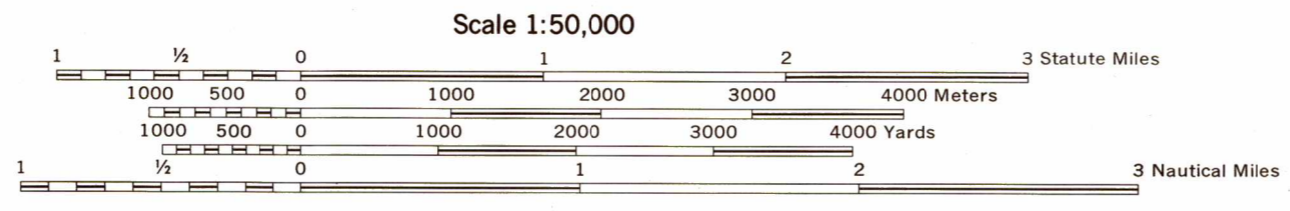

E751 Edition 1-AMS. Prepared by the Oficina de Geodesia, Ministerio de Fomento, Managua, Nicaragua, in collaboration with the Inter-American Geodetic Survey (IAGS).

CONTOUR INTERVAL 20 METERS. INTERVALO DE CURVAS DE NIVEL DE 20 METROS. VERTICAL DATUM: MEAN SEA LEVEL.

TRANSVERSE MERCATOR PROJECTION. HORIZONTAL DATUM: 1927 NORTH AMERICAN DATUM.

BLACK NUMBERED LINES INDICATE THE 1,000 METER UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 16, CLARKE 1866 SPHEROID.

USERS SHOULD REFER TO CORRECTIONS, ADDITIONS, AND COMMENTS TO THE NIMA CUSTOMER HELP DESK: 1-800-456-0889.


GRID CONVERGENCE 0°19' (2 MILES) FOR CENTER OF SHEET.

TO CONVERT A MAGNETIC AZIMUTH TO A GRID AZIMUTH ADD G-M ANGLE.

PARA CONVERTIR UN ACIMUT MAGNÉTICO A UN ACIMUT DE CUADRÍCULA SUMESE EL ÁNGULO C-M.

TO CONVERT A GRID AZIMUTH TO A MAGNETIC AZIMUTH SUBTRACT G-M ANGLE.

PARA CONVERTIR UN ACIMUT DE CUADRÍCULA A UN ACIMUT MAGNÉTICO RESTÉSE EL ÁNGULO C-M.

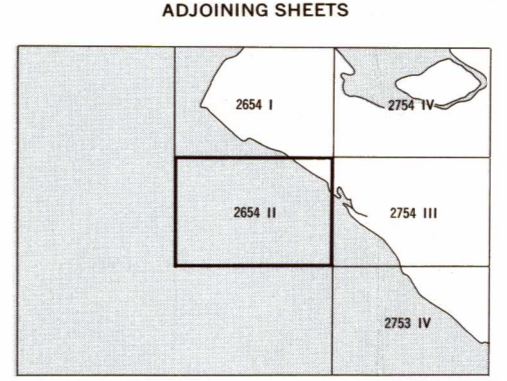

Sheet 2654 II falls within ND 16-14, E503, 1:250,000

Grid zone designation table with columns for grid zone, grid square, and grid square identification. Includes instructions for using the grid.

LIMITED DISTRIBUTION. Distribution authorized to DOD, JAN 10 1955, 8:40 AM. Release authorized by USG. 2003 continuation.

ESTERO PADRE RAMOS, NICARAGUA