



LEGEND SIGNOS CONVENCIONALES. On this map a lane is considered as being a minimum of 2.5 meters in width. En este mapa se considera que una vía tiene un ancho mínimo de 2.5 metros. Includes symbols for roads, railroads, boundaries, and natural features.

GLOSSARY GLOSARIO. Lists geographical features and their corresponding symbols in Spanish and English, such as 'Agua' (water), 'Cerro' (mountain), and 'Volcán' (volcano).

MAP INFORMATION AS OF 1973. INFORMACION DE MAP A CORRIENTE AL 1973. Prepared and published by the Defense Mapping Agency Hydrographic/Topographic Center, Washington, D. C.

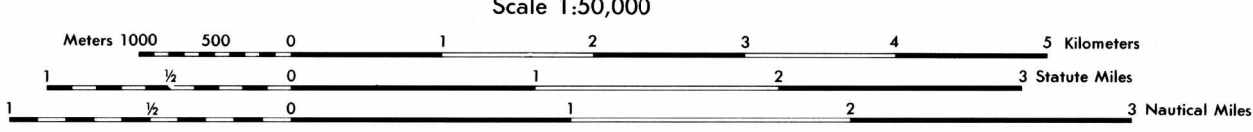

CONTOUR INTERVAL 20 METERS. INTERVALO DE CURVAS DE NIVEL DE 20 METROS. Includes information about the spheroid used (Clarke 1866) and projection (Transverse Mercator).

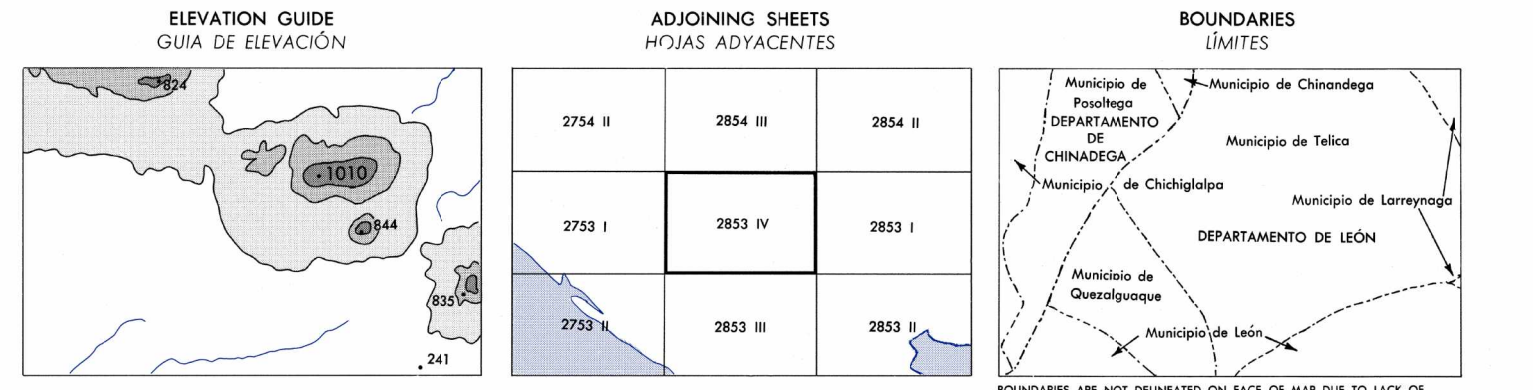

Grid zone designations and identification information. Includes a 100-meter reference grid diagram and instructions for reporting grid coordinates.

1975 G.M. ANGLE 4° 02' (90 METS) ANCHO: 41 02' 005 49" 00' (METS). TO CONVERT A MAGNETIC AZIMUTH TO A GRID AZIMUTH... TO CONVERT A GRID AZIMUTH TO A MAGNETIC AZIMUTH...