



LEGEND SIGNOS CONVENCIONALES. On this map a lane is considered as being a minimum of 2.5 meters in width. En este mapa se considera que una vía tenga un ancho mínimo de 2.5 metros. Includes symbols for roads, railways, water features, and other landmarks.

GLOSSARY GLOSARIO. Lists symbols and their corresponding features such as Arroyo, Barrío, Cañal, Corriero, etc.

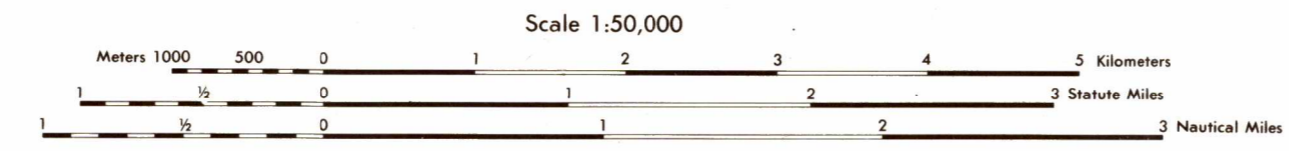

CONTOUR INTERVAL 20 METERS. INTERVALO DE CURVAS DE NIVEL DE 20 METROS. Includes information about the spheroid used (Clarke 1866) and grid convergence.

ELEVATION GUIDE. TO CONVERT A MAGNETIC AZIMUTH TO A GRID AZIMUTH. TO CONVERT A GRID AZIMUTH TO A MAGNETIC AZIMUTH. Includes a diagram showing magnetic declination.

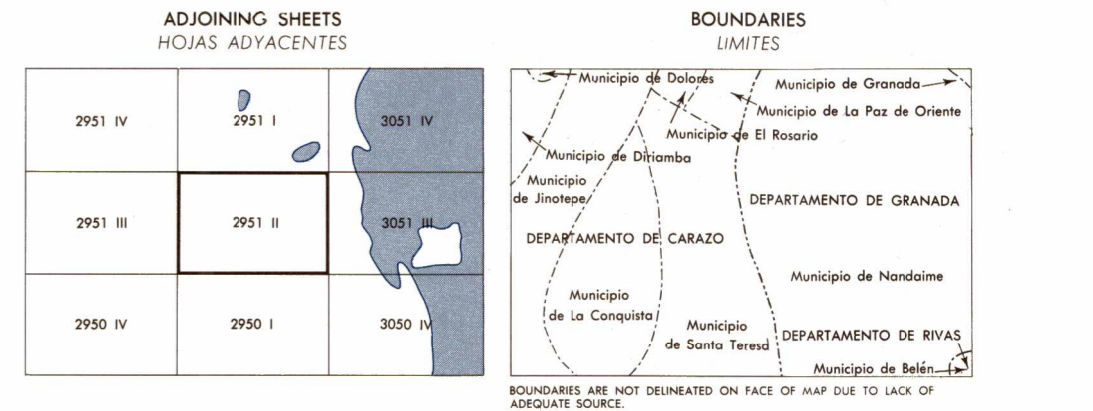

MAP INFORMATION AS OF 1972. INFORMACIÓN DE MAP A CORRIENTE AL 1972. Prepared and published by the Defense Mapping Agency Hydrographic/Topographic Center, Washington, D. C. Includes grid square identification and reporting instructions.