


Prepared and published by the Defense Mapping Agency Hydrographic/Topographic Center, Washington, D.C.

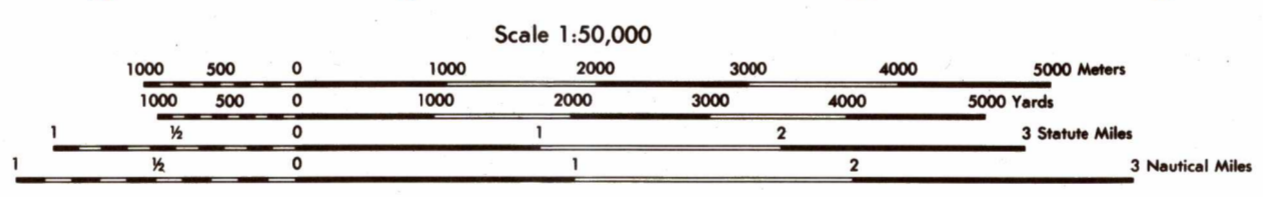

LEGEND MAP INFORMATION AS OF 1968 On this map a lane is generally considered as being 8-12 feet (2.5-3.6 meters) in width EN ESTE MAP UNA VÍA TIENE GENERALMENTE UNA ANCHURA DE 8-12 PIES (2.5-3.6 METROS)

Table with 3 columns: English symbols and descriptions, Spanish symbols and descriptions, and Spanish symbols and descriptions. Includes categories like Roads, Power, and Landmarks.

CONTOUR INTERVAL 20 METERS SUPPLEMENTARY CONTOURS 10 METERS INTERVALO DE CURVAS 20 METROS CURVAS SUPLEMENTARIAS CADA 10 METROS

SPHEROID CLARKE 1866 GRID 1,000 METER UTM ZONE 17 (BLACK NUMBERED LINES) 1,000 METER LAMBERT, NICARAGUA NORTH ZONE (BLUE NUMBERED TICKS) 1,000 METER LAMBERT, HONDURAS NORTH ZONE (BROWN NUMBERED TICKS) PROJECTION TRANSVERSE MERCATOR HORIZONTAL DATUM NORTH AMERICAN 1927 DATUM CONTROL BY NATIONAL GEOGRAPHIC INSTITUTE

Grid reference examples and instructions for reporting coordinates across the grid zone and outside the grid zone.

ELEVATION GUIDE, ADJOINING SHEETS, and BOUNDARIES sections.

GLOSSARY, THIS MAP IS RED-LIGHT READABLE, and LIMITED DISTRIBUTION notices.