CAMBODIA 1:50,000 កម្ពុជា ១:៥០,០០០

© COPYRIGHT 1993 BY THE UNITED STATES GOVERNMENT.
NO COPYRIGHT CLAIMED UNDER TITLE 17 U.S.C.

SRÊ ÂMBĚL

EDITION 2-DMA SERIES L7016 SHEET 5731 II

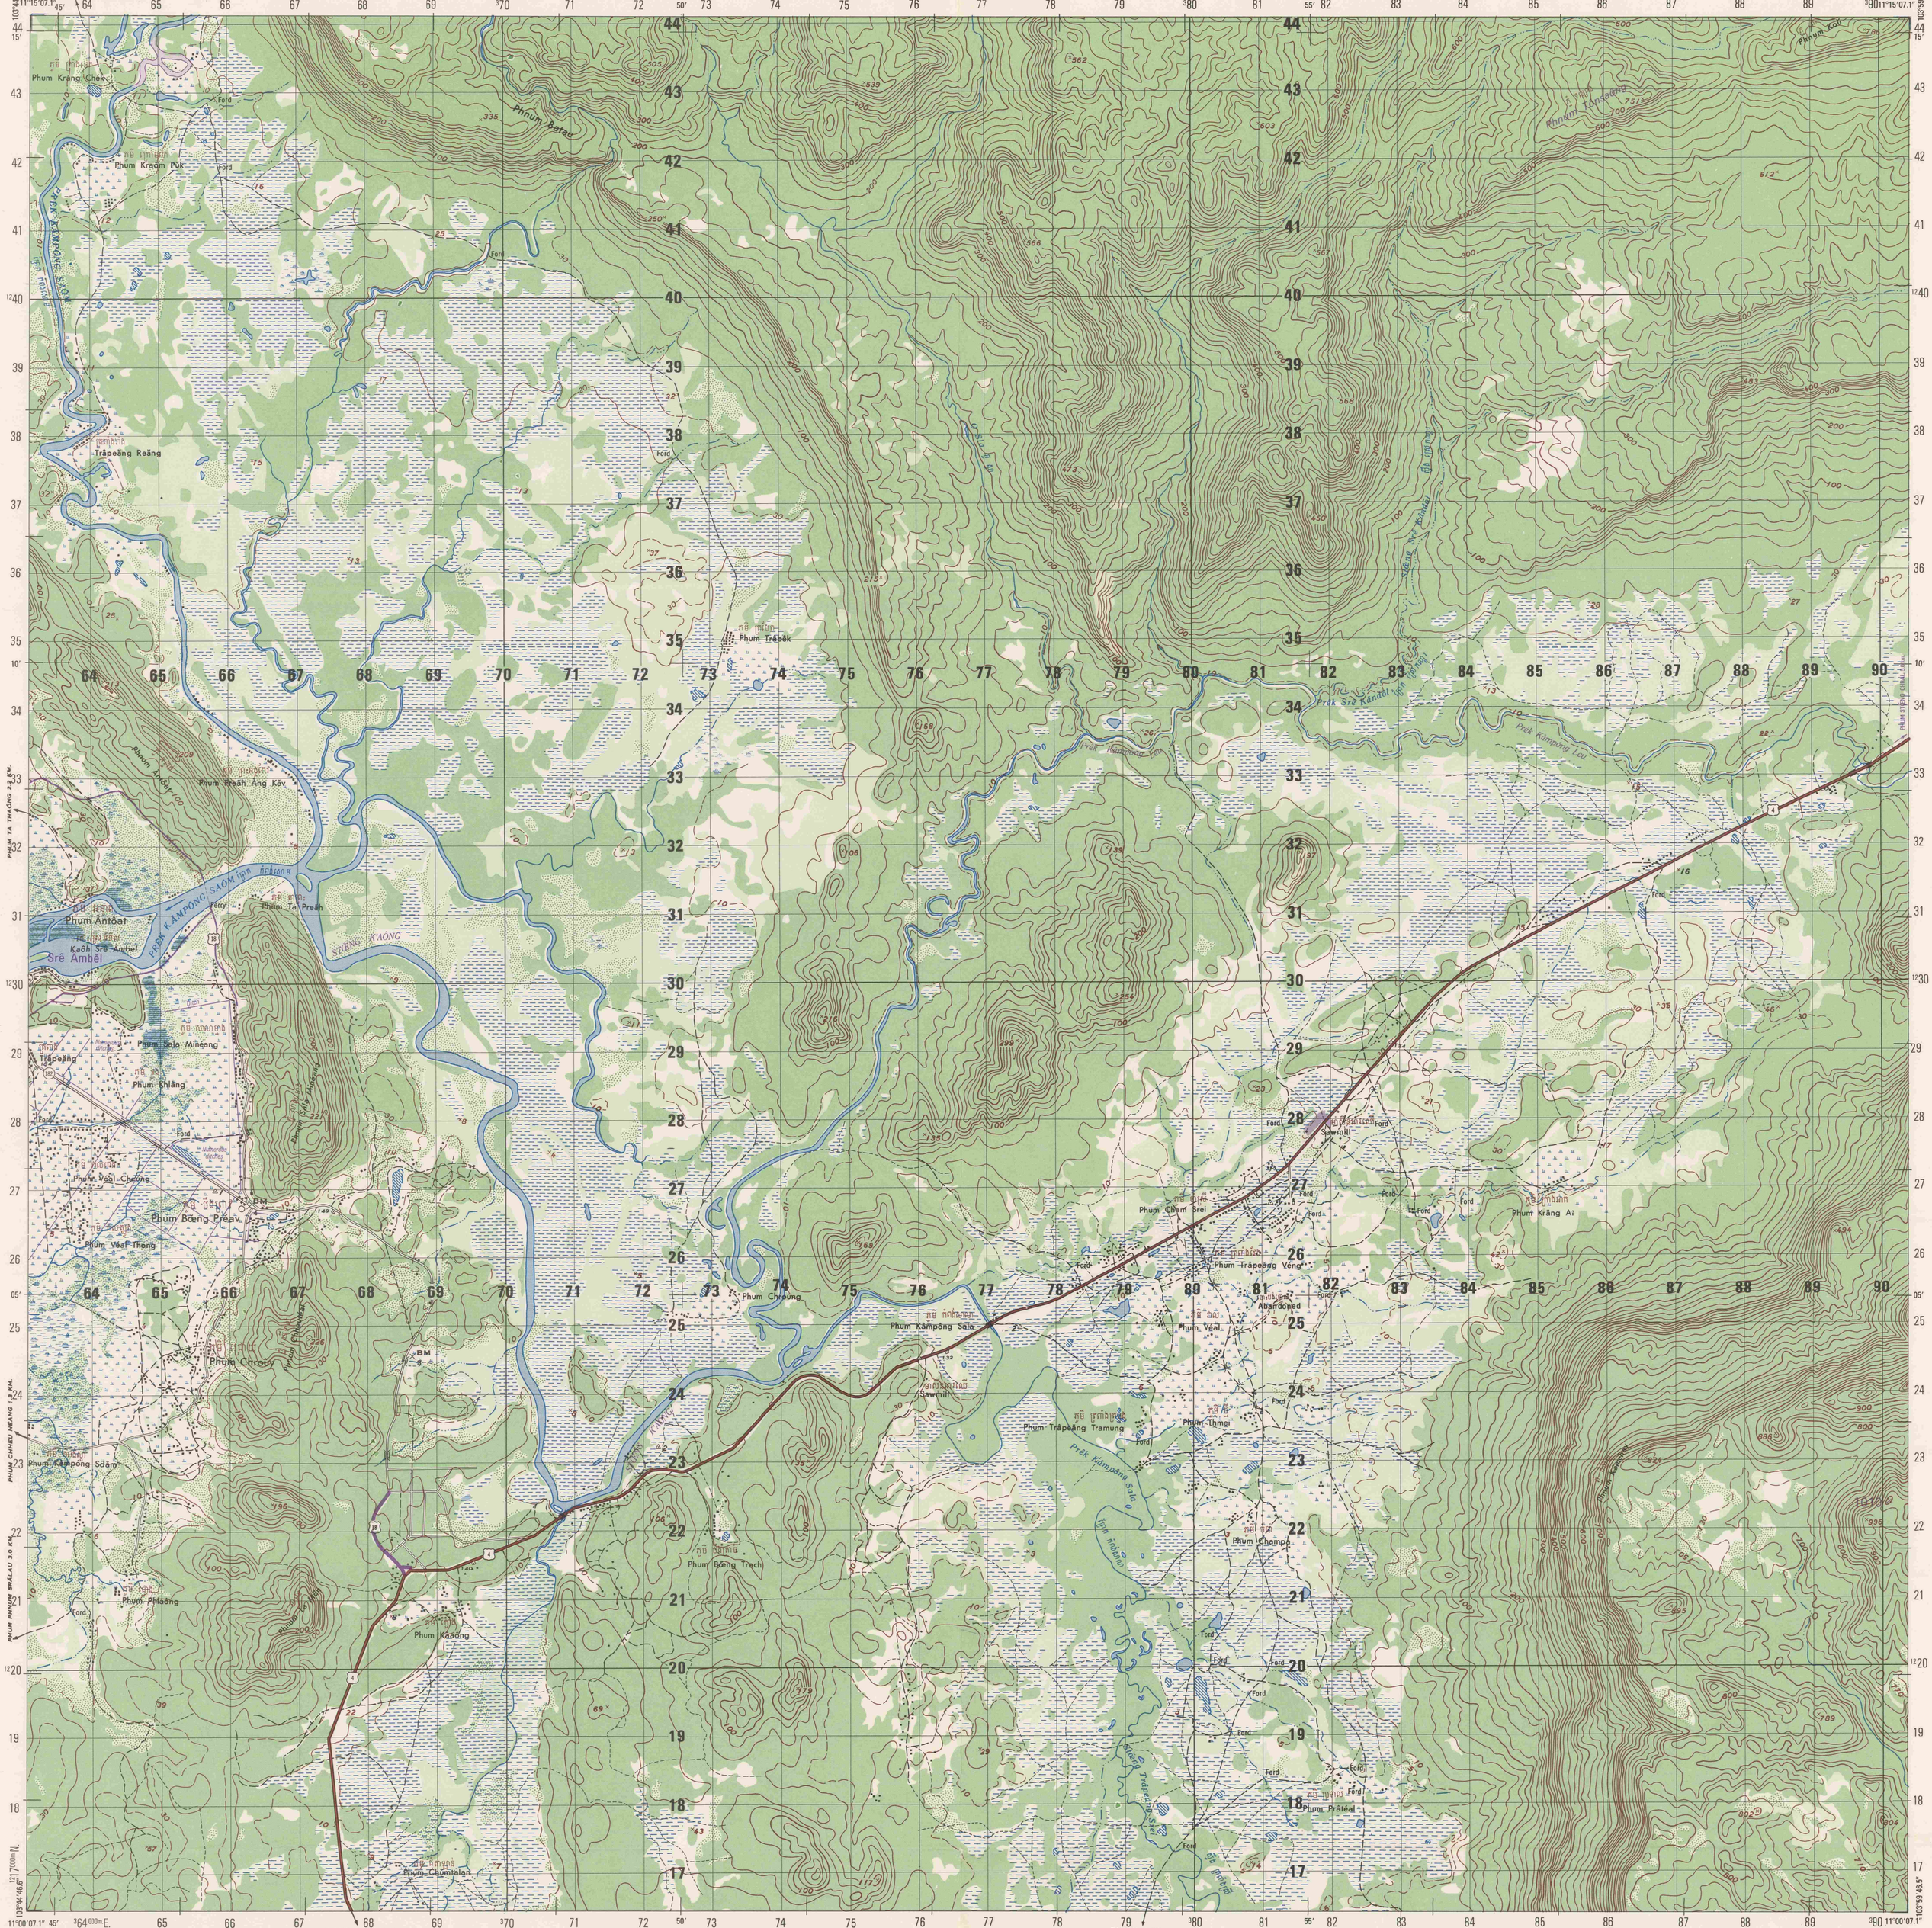

One second of latitude equals 30.73 m. One second of longitude equals 30.36 m

One second of longitude equals 30.33 m

Prepared and published by the Defense Mapping Agency
Hydrographic/Topographic Center, Bethesda, MD.

LEGEND – សញ្ញាផែនទី

On this map a LANE is considered as being a minimum of 2.4 m (8 feet) in width – នៅលើផែនទីនេះ ផ្លូវបន្ទូត (Lane) មានទទឹងយ៉ាងតិច ២.៤ ម (៨ ហ្វីត)

Dense forest or jungle indicates more than 25 percent of ground is concealed by canopy with undergrowth generally impassable on foot.
ព្រៃក្រាស់ ឬព្រៃធំតាមរយៈសរសៃដើមឈើ តាមកន្លែងជាច្រើន គឺ ២៥ ភាគរយ ប៉ះប៉ូនគ្នា ដែលមានស្មៅ ដុះក្រាស់ ដើរកាត់ជើងមិនបានងាយស្រួលនោះ ។

Clear forest indicates more than 25 percent of ground is concealed by canopy with undergrowth generally passable on foot.
ព្រៃមានតែ ២០ភាគរយ ប៉ុណ្ណោះ ដែលមានសរសៃដើមឈើ ២៥ ភាគរយ ដែលមានមានស្មៅ ដុះ ។

In areas of dense or clear forest overprinted with bamboo symbol, the vegetation is predominantly bamboo. Vegetation classified by field observation and office identification from aerial photography.
នៅលើតំបន់ ដែលមានសញ្ញាផែនទីរាងមានរាងជាមួយ ស្លាបមានរាងដូចនេះ ដែលមានសញ្ញាផ្ទៃ ១ ។ ការវាយតម្លៃ ដោយការសង្កេតនៅតាមវាលស្រែ ។

Areas symbolized as land subject to inundation are generally flooded during July-December. Other areas may be flooded for shorter periods.
តំបន់ដែលមានបង្ហាញជាសញ្ញាជាមួយ ជាទូទៅ ជាប្រចាំ ខែកក្កដា-ធ្នូ ។ ចំណែកតំបន់ផ្សេងទៀត ទៅ ១ ឆ្នាំ ។

The number in parentheses following a village name indicates that more than one village is so named – លេខក្នុងតង្កៀតក្រោយ ឈ្មោះភូមិ សំដៅថាភូមិ ដូចគ្នាមានច្រើន

ROADS— ផ្លូវ
- All weather— គប់ផ្លូវ
  - Hard surface, two or more lanes wide — ១៣ LANES
  - Loose surface, two or more lanes wide — ១៣ LANES
  - Hard surface, one lane wide
  - Loose surface, one lane wide
- Fair or dry weather, loose surface
- Cart track— ផ្លូវ ... — Footpath; trail— ...
- Route marker: National; Provincial — 26 33
- Kilometer post— ...
- RAILROADS— ...
  - Normal gauge, 1 meter (3'3.7") wide
  - Single track, with station
  - Double track
  - Narrow gauge, single track
- Built-up area— ...
- Village— ...
- Khêt; Srŏk; Khum office

International boundary
Khêt boundary
Srŏk boundary
Church; School: Major, Minor
Temple: Major, Minor; Mosque
Resthouse or campsite; Stupa
Post office; Telegraph; Telephone
Airfield: All weather, Dry season
Cemetery — Cem
Wall; Levee
Bridge, wood— ...
Bridge, steel— ...
Bridge, concrete— ...
Footbridge— ...
Ferry— ... — Ferry
Ford— ... — Ford
Large rapids— ...
Large falls— ...; Small falls— ...
Depth curves, Soundings in meters
Seawall or revetment— ...

Road on levee— ...
Lighthouse— ...
Sand— ...
Horizontal control point: Primary, Other
Bench mark — BM ×792
Spot elevation in meters:
Checked, Unchecked — ×729 ×729
Canal or ditch— ...
Less than 18 meters wide,
Over 18 meters wide
Masonry dam; Earthen dam
Lake or pond: Perennial, Intermittent
Salt evaporator— ...
Dense forest or jungle; Clear forest
Plantation; Brushwood
Bamboo; Scattered sugar palm
Land subject to inundation
Marsh or swamp; Ricefield
Nipa; Mangrove

Built-up area
Building
All weather hard surface road
All weather loose surface road
Fair/dry weather road, track, street
Railroad
Powerline
Pipeline
Fence
Landmark area
Landmark feature
Tank
Bridge
Shoreline; stream
Reservoir
Elevations in meters, not verified:
Highest ×494
Normal ×189

LIMITED REVISIONS MAP INFORMATION AS OF 1990

REVISIONS IN PURPLE

Scale 1:50,000 ឡានដាស ១:៥០,០០០

1 ½ 0 1 2 3 Statute Miles
1000 500 0 1000 2000 3000 4000 Meters
1000 500 0 1000 2000 3000 4000 Yards
1 ½ 0 1 2 3 Nautical Miles

ELEVATIONS IN METERS
CONTOUR INTERVAL 20 METERS
SUPPLEMENTARY CONTOURS 5 AND 10 METERS

ELLIPSOID ..... WORLD GEODETIC SYSTEM 1984
GRID ..... 1,000 METER UTM ZONE 48
PROJECTION ..... TRANSVERSE MERCATOR
VERTICAL DATUM ..... MEAN SEA LEVEL AT HÀ TIÊN
HORIZONTAL DATUM ..... WORLD GEODETIC SYSTEM 1984
PRINTED BY ..... DMAHTC 9-93

COORDINATE CONVERSION: WGS 84 TO INDIAN 1960
Grid: Add 423 m. E.; Subtract 317 m. N.
Geographic: Add 13.4" Long.; Subtract 7.1" Lat.

GN — GRID NORTH — MAGNETIC NORTH — TRUE NORTH
1990 G-M ANGLE 0° (0 MILS)
GRID CONVERGENCE 0°13' (4 MILS) FOR CENTER OF SHEET

NOTES

CAUTION: NOT ALL TELEPHONE AND ELECTRICAL SERVICE LINES ARE SHOWN.

TO CONVERT METERS TO FEET MULTIPLY BY 3.28.

GLOSSARY

Kaôh	island
Khêt	first-order administrative division
O	creek
Phnum	mountain
Phum	settlement
Prêk	stream
Stêng	stream

USERS SHOULD REFER CORRECTIONS, ADDITIONS, AND COMMENTS FOR IMPROVING THIS PRODUCT TO: DIRECTOR, DEFENSE MAPPING AGENCY, ATTN: PR, 8613 LEE HIGHWAY, FAIRFAX, VA 22031-2137

ELEVATION GUIDE

BOUNDARIES

KHÊT KAÔH KÔNG

ADJOINING SHEETS

5731 IV	5731 I	5831 IV
5731 III	5731 II	5831 III
	CHHAK KAMPONG SAOM	
5730 IV	5730 I	5830 IV

Sheet 5731 II falls within NC 48-2, 1501A, 1:250,000.

Highest
High
Medium
Low

LIMITED DISTRIBUTION: Distribution authorized to the Department of Defense, U.S. DoD contractors and to U.S. Government Agencies supporting DoD functions (by authority of the Director, Defense Mapping Agency, 30 May 1990). Other requests shall be referred to Headquarters, DMA, ATTN: SOP. Destroy as "For Official Use Only."

SAMPLE 1,000 M. GRID SQUARE.
EXAMPLE DU CARRÉ DE 1.000 M.

46 Sample point 45 12 13

100,000 M. SQUARE IDENTIFICATIONS.
IDENTIFICATIONS DU CARRÉ DE 100.000 M.

UT

GRID ZONE DESIGNATION.
DÉSIGNATION DE LA ZONE DU QUADRILLAGE.

48P

TO REFERENCE TO NEAREST 100 METERS
POUR OBTENIR LES COORDONNÉES HECTOMÉTRIQUES UTM D'UN POINT

FOR REPORTING LOCALLY:
Read large numbers labeling VERTICAL grid line left of point and estimate tenths; then read large numbers labeling HORIZONTAL grid line below point and estimate tenths.

EN RAPPORTANT SUR PLACE:
Inscrire les gros chiffres de la numérotation de la ligne VERTICALE du quadrillage située à gauche du point et estimer en dixièmes; puis inscrire les gros chiffres de la numérotation de la ligne HORIZONTALE du quadrillage située au-dessous du point et estimer en dixièmes.

Exemple: Example: 123456

FOR REPORTING BEYOND 100,000 METERS:
Prefix 100,000 meter square identification.

EN RAPPORTANT AU DELÀ DE 100.000 MÈTRES:
Faire précéder l'identification du carré de 100.000 mètres.

Exemple: Example: UT123456

FOR REPORTING BEYOND 9° N–S or 18° E–W:
Prefix grid zone designation.

EN RAPPORTANT AU DELÀ DE 9° N–S ou DE 18° E–O:
Faire précéder la désignation de la zone du quadrillage.

Exemple: Example: 48PUT123456

SRÊ ÂMBĚL, CAMBODIA 5731 II L7016 EDITION 2-DMA

DMA STOCK NO. L701657312 ED. NO. 002

G05204014008O