CAMBODIA 1:50,000

BARAYN

EDITION 2-DMA SERIES L7016 SHEET 6033 IV

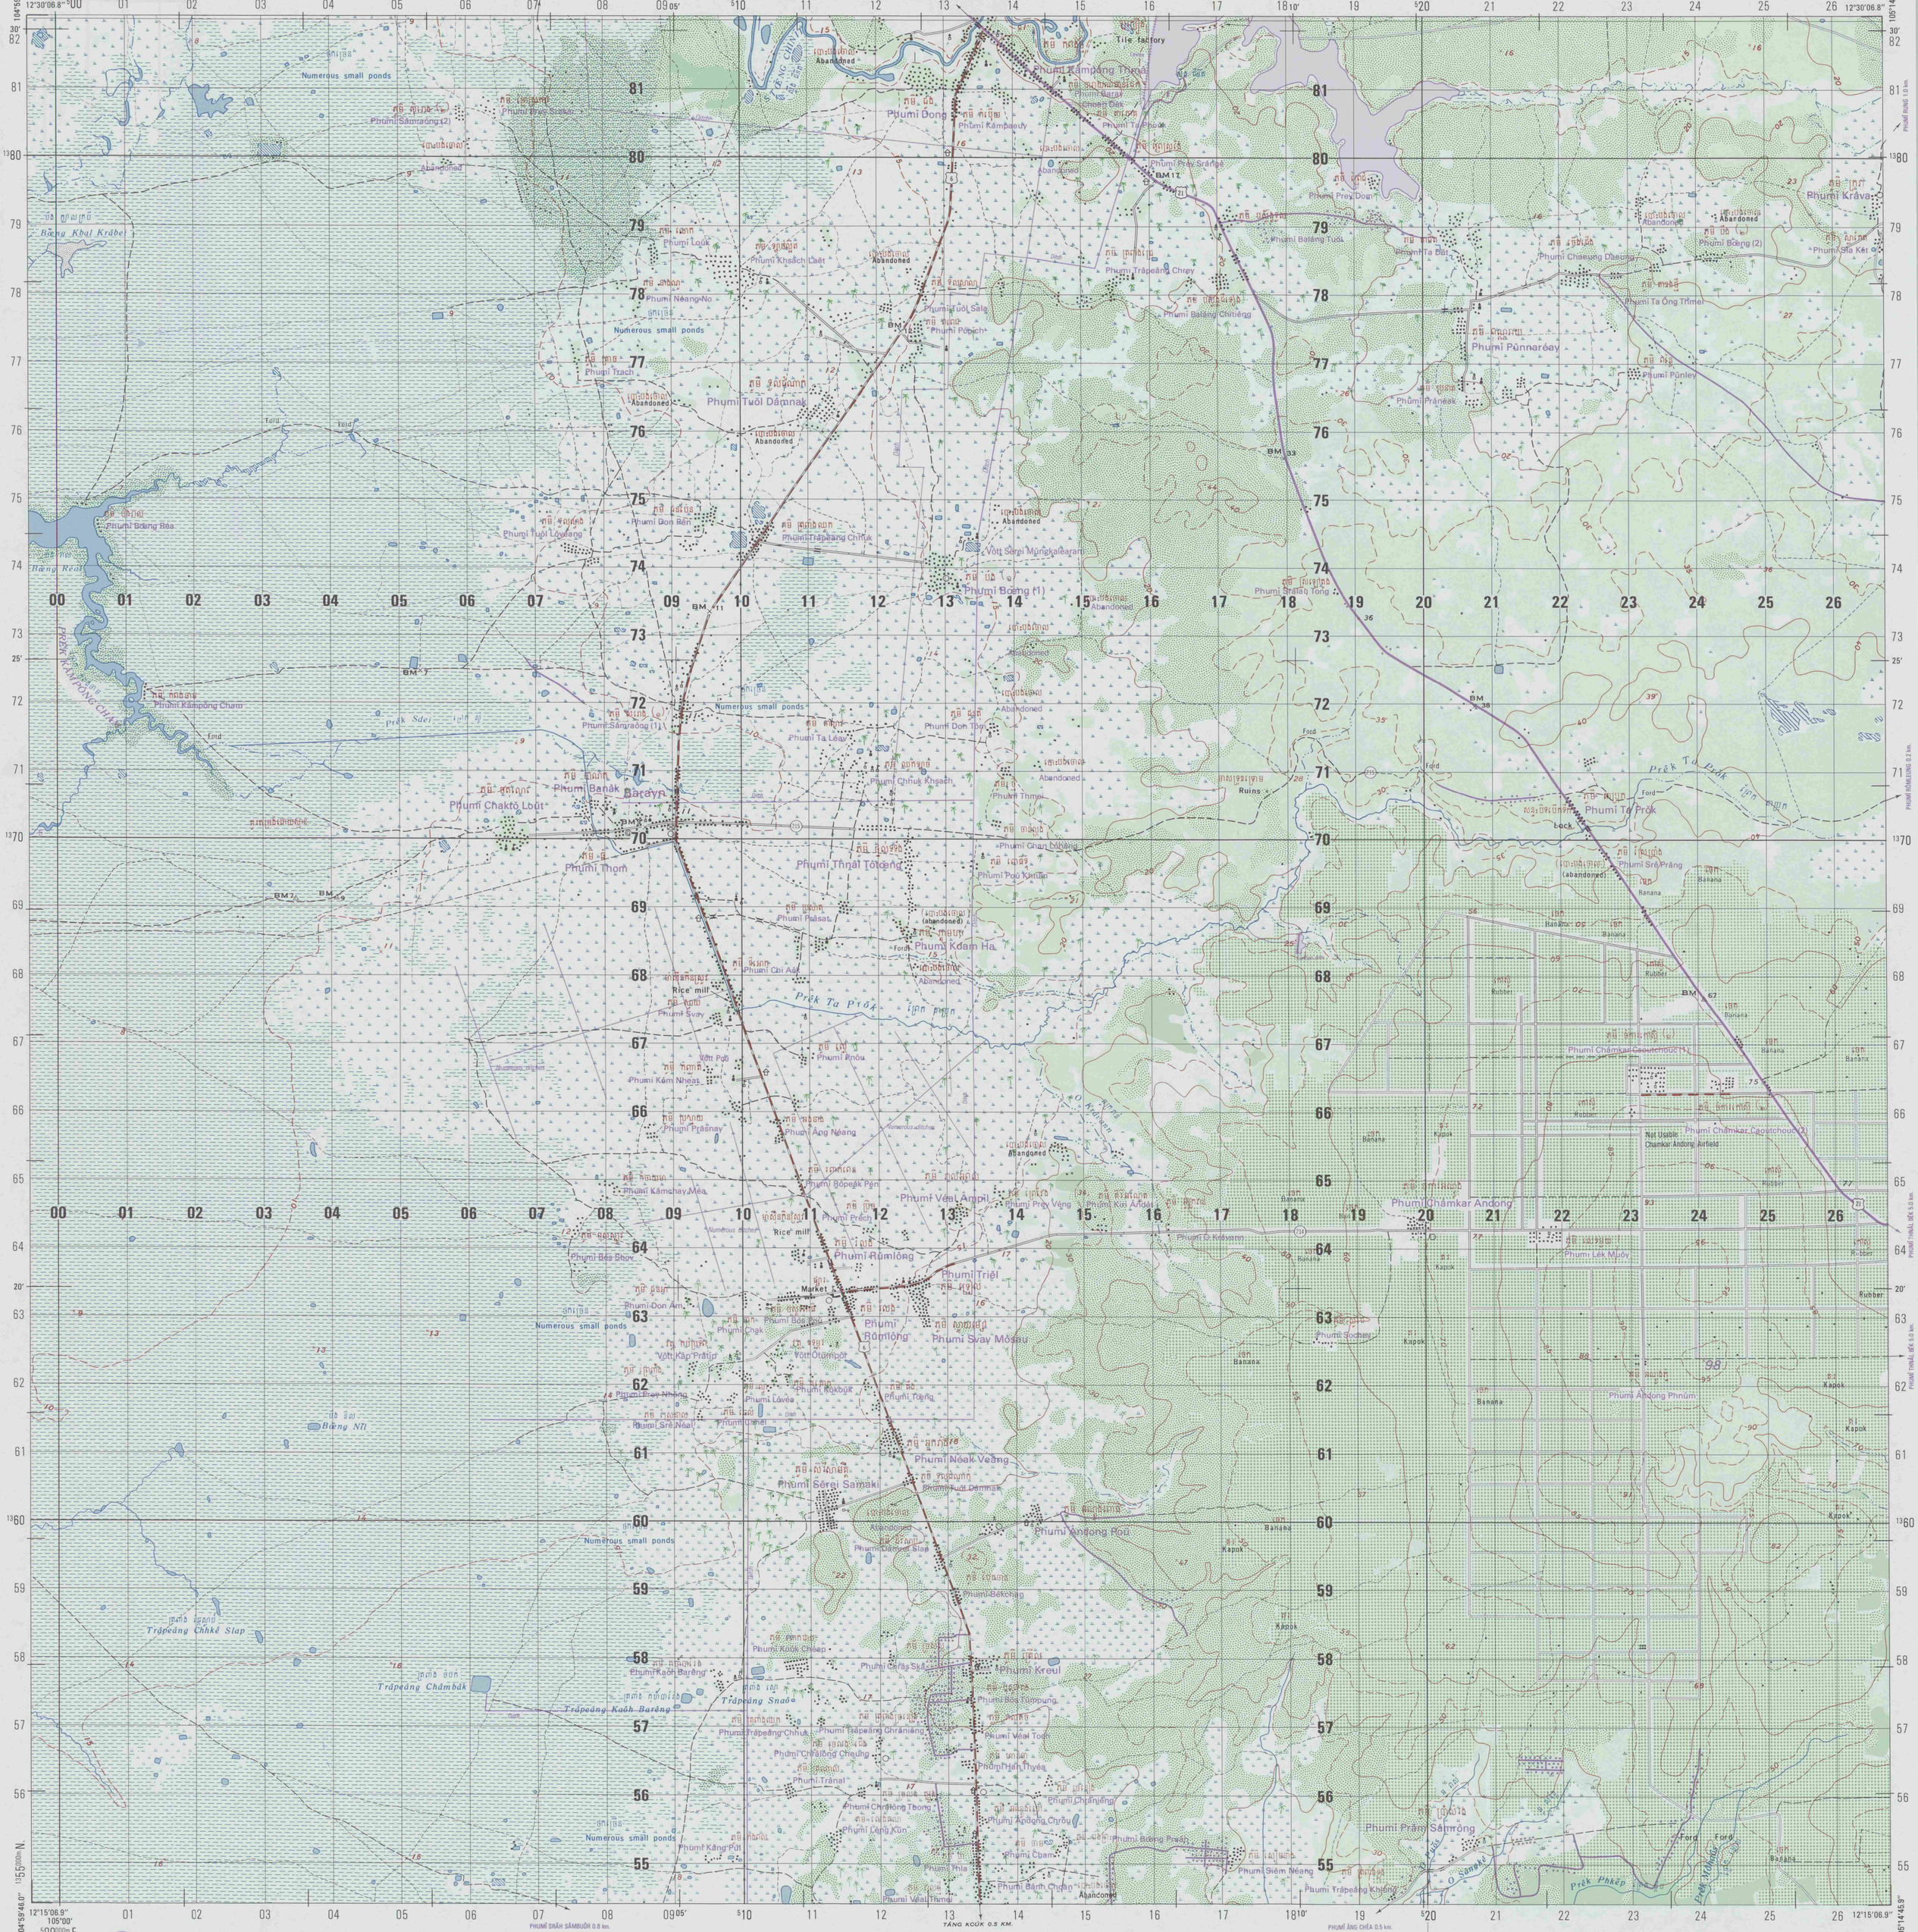

Prepared and published by the Defense Mapping Agency
Hydrographic/Topographic Center, Bethesda, MD

LEGEND – សញ្ញារំលឹម

On this map a LANE is considered as being a minimum of 2.4 m (8 feet) in width – នេះលីវ៉ែនទីកន្លះ: ទទឹងខ្សែ (Lane) គេកម្ពស់ឯ ២.៤ (៨ ហ្វីត)
Dense forest or jungle indicates more than 25 percent of ground is concealed by canopy with undergrowth generally impassable on foot.
ព្រៃក្រាស់ឬព្រៃតឹងណែនដែលមានលើដីគម្របលើកាតលើសក្នុងរយៈ ២៥ ភាគរយ ហើយជាទូទៅមានដានមនុស្សលក្ខណៈ ។
Clear forest indicates more than 25 percent of ground is concealed by canopy with undergrowth generally passable on foot.
ព្រៃសាមញ្ញ: គឺជាព្រៃដែលមានលើដីគម្របលើកាតលើសក្នុងរយៈ ២៥ ភាគរយ ហើយជាទូទៅមានមនុស្សលក្ខណៈ ។
In areas of dense or clear forest overprinted with bamboo symbol, the vegetation is predominantly bamboo. Vegetation classified by field observation and office identification from aerial photography.
នេះលីវ៉ែនណាស់ជាដាច់ដាច់ព្រៃត្រាស់ឬព្រៃសាមញ្ញ ដែលមានរាងរាងរបស់ឫស្សី ។ ការកំណត់ព្រៃតាមការសង្កេតនៅលើដី និងការកំណត់ដោយការប្រើប្រាស់ឧបករណ៍ពិនិត្យតាមអាកាសនៅការិយាល័យ ។
Areas symbolized as land subject to inundation are generally flooded during July–December. Other areas may be flooded for shorter periods.
ក៏ដូចគ្នាសញ្ញាដែលមានបង្ហាញជាលក្ខណៈជាទីតាមទឹកជាដែរ គឺជាអនុញ្ញា ក៏ដូចគ្នានៅទីកកើតក្នុងរយៈពេលខ្លី ។ ទីកកើនឡើងជាញឹកញាប់ ២ ដូចជាបង្ហាញសញ្ញាទី ។
The number in parentheses following a village name indicates that more than one village is so named – លេខក្នុងវង់ក្រចកតាមឈ្មោះភូមិ បានសរសេរបានលេខរៀងគ្នា

ROADS— ផ្លូវ
All weather— គរណ៍ផ្លូវ
Hard surface, two or more lanes wide — 3 LANES
Loose surface, two or more lanes wide — 3 LANES
Hard surface, one lane wide
Loose surface, one lane wide
Fair or dry weather, loose surface
Cart track— ផ្លូវ ... Footpath; trail— ...
Route marker: National; Provincial — 26 33
Kilometer post— ... 10
RAILROADS— ...
Normal gauge, 1 meter (3'3.7") wide
Single track, with station
Double track
Narrow gauge, single track
Built-up area— ...
Village— ...
Khêt; Srŏk; Khum office

International boundary
Khêt boundary
Srŏk boundary
Church; School: Major, Minor
Temple: Major, Minor; Mosque
Resthouse or campsite; Stupa
Post office; Telegraph; Telephone
Airfield: All weather, Dry season
Cemetery — Cem
Kilometer post
Wall; Levee
Bridge, wood
Bridge, steel
Bridge, concrete
Footbridge
Ferry — Ferry
Ford — Ford
Large rapids
Large falls; Small falls
Depth curves, Soundings in meters
Seawall or revetment

Road on levee
Lighthouse
Sand
Horizontal control point: Primary, Other
Bench mark — BM ×792
Spot elevation in meters: ×729 ×729
Checked, Unchecked
Canal or ditch: Less than 18 meters wide; Over 18 meters wide
Masonry dam; Earthen dam
Lake or pond: Perennial, Intermittent
Salt evaporator
Dense forest or jungle; Clear forest
Plantation; Brushwood
Bamboo; Scattered sugar palm
Land subject to inundation
Marsh or swamp; Ricefield
Nipa; Mangrove

One second of latitude equals 30.73m — Scale 1:50,000 — One second of longitude equals 30.22m

3 Statute Miles
3 Nautical Miles

CONTOUR INTERVAL-20 METERS
SUPPLEMENTARY CONTOURS-5 AND 10 METER

LIMITED REVISIONS
MAP INFORMATION AS OF 1993

ELLIPSOID ..... WORLD GEODETIC SYSTEM 1984
GRID ..... 1,000 METER UTM ZONE 48
PROJECTION ..... TRANSVERSE MERCATOR
VERTICAL DATUM ..... MEAN SEA LEVEL
HORIZONTAL DATUM ..... WORLD GEODETIC SYSTEM 1984
PRINTED BY ..... DMAHTC 7-94

REVISIONS IN PURPLE

ELEVATIONS IN METERS

CREDITS
PREPARED BY ..... U. S. ARMY TOPOGRAPHIC COMMAND
NAMES DATA BY ..... SERVICE GÉOGRAPHIQUE DES F.A.N.K.
CONTROL BY ..... SERVICE GEOGRAPHIQUE DE L'INDOCHINE AND USAMSFE
PRINTED BY ..... U. S. ARMY TOPOGRAPHIC COMMAND 7-71

COORDINATE CONVERSION WGS 84 TO INDIAN DATUM 1960
Grid: Add 421 m. E.; Subtract 319 m. N.
Geographic: Add 14.0" Long.; Subtract 6.8" Lat.

LEGEND
Building
All weather hard surface road
All weather loose surface road
Fair/dry weather road, track, street
Spot elevation: highest, normal — ·494 ·189
Bridge
Open water

NOTES
CAUTION: NOT ALL TELEPHONE AND ELECTRIC SERVICE LINES ARE SHOWN.
TO CONVERT METERS TO FEET MULTIPLY BY 3.28.
SLOPES ON THIS MAP ARE LESS THAN 5%
USERS SHOULD REFER CORRECTIONS, ADDITIONS, AND COMMENTS FOR IMPROVING THIS PRODUCT TO: DIRECTOR, DEFENSE MAPPING AGENCY, ATTN: PR, 8613 LEE HIGHWAY, FAIRFAX, VA 22031-2137.

GLOSSARY
GLOSSAIRE

Bâeng	lake
Khêt	first-order administrative division
O	stream
Phumi	populated place
Prêk	stream
Stêng	stream
Trâpeâng	pond
Vôtt	temple

[redacted]

TO CONVERT A MAGNETIC AZIMUTH TO A GRID AZIMUTH SUBTRACT G-M ANGLE
TO CONVERT A GRID AZIMUTH TO A MAGNETIC AZIMUTH ADD G-M ANGLE

ELEVATION GUIDE

BOUNDARIES

ADJOINING SHEETS

5934 II	6034 III	6034 II
5933 I TONLÉ SAB	6033 IV	6033 I
5933 II	6033 III	6033 II MEKONG

Sheet 6033 IV falls within ND49-16, 1501A, 1:250,000.

SAMPLE 1,000 M. GRID SQUARE.
EXAMPLE DU CARRÉ DE 1.000 M.

100,000 M. SQUARE IDENTIFICATIONS.
IDENTIFICATIONS DU CARRÉ DE 100.000 M.
VU WU 500

GRID ZONE DESIGNATION.
DÉSIGNATION DE LA ZONE DU QUADRILLAGE.
48P

TO REFERENCE TO NEAREST 100 METERS
POUR OBTENIR LES COORDONNÉES HECTOMÉTRIQUES UTM D'UN POINT

FOR REPORTING LOCALLY:
Read large numbers labeling VERTICAL grid line left of point and estimate tenths; then read large numbers labeling HORIZONTAL grid line below point and estimate tenths.
EN RAPPORTANT SUR PLACE:
Inscrire les gros chiffres de la numérotation de la ligne VERTICALE du quadrillage située à gauche du point et estimer en dixièmes; puis inscrire les gros chiffres de la numérotation de la ligne HORIZONTALE du quadrillage située au-dessous du point et estimer en dixièmes.
Exemple: Example: 123456

FOR REPORTING BEYOND 100,000 METERS:
Prefix 100,000 meter square identification.
EN RAPPORTANT AU DELÀ DE 100.000 MÈTRES:
Faire précéder l'identification du carré de 100.000 mètres.
Exemple: Example: WU123456

FOR REPORTING BEYOND 9° N–S or 18° E–W:
Prefix grid zone designation.
EN RAPPORTANT AU DELÀ DE 9° N–S ou DE 18° E–O:
Faire précéder la désignation de la zone du quadrillage.
Exemple: Example: 48PWU123456

© COPYRIGHT 1994 BY THE UNITED STATES GOVERNMENT.
NO COPYRIGHT CLAIMED UNDER TITLE 17 U.S.C.

DMA STOCK NO. L701660334 ED. NO. 002