



LIMITED REVISIONS AS OF 1995 MAP INFORMATION AS OF 1994
Prepared by the Army Map Service (S&H), Corps of Engineers, U. S. Army, Washington, D. C. Compiled in 1959 from Karte des Nordwestbalkan, 1:50,000, Generalstab des Heeres, Sheet 115/1, edition 1943, Sheet 115/2, edition 1942. Map not field checked.

Prepared and published by the Defense Mapping Agency
Aerospace Center, St. Louis, Missouri.

LEGEND ΥΠΟΜΝΗΜΑ
Black figures along roads indicate road widths in meters.
On this map a lane is generally considered as being 8 to 12 feet (2.5 to 3.6 meters) in width. Known exceptions are indicated on the face of the map.
Spot elevations in meters: Checked, Unchecked

ROADS ΟΔΟΙ:
All weather, hard surface, two or more lanes wide
All weather, loose or light surface, two or more lanes wide
All weather, hard surface, one lane wide; Route marker
Fair or dry weather, loose surface
Cart track; Footpath; trail; Kaperonitis; δρόμος με ασφάλην ή έπιχρη ασφάλτου
Free lined road 0.90m, μετρη ή υπολογιστικός
Normal gauge 1.44m (4'9 1/2")
Narrow gauge


BOUNDARIES ΣΤΡΑΤΗΣ ΓΡΑΜΜΑΙ:
Primary administrative
Secondary administrative
Wall; fence or hedge
Prominent fence
Earthen dam; Levee
Sinkholes

BOUNDARIES ΣΤΡΑΤΗΣ ΓΡΑΜΜΑΙ:
International
Primary administrative
Secondary administrative
Wall; fence or hedge
Prominent fence
Earthen dam; Levee
Sinkholes

LEGEND
Built-up area
All weather, hard surface roads
All weather, loose surface roads
Fair or dry weather roads, tracks, streets
Open water
Powerline

ELEVATIONS IN METERS
Elevations in meters: Checked, Unchecked

REVISIONS IN PURPLE
Built-up area
All weather, hard surface roads
All weather, loose surface roads
Fair or dry weather roads, tracks, streets
Open water
Powerline

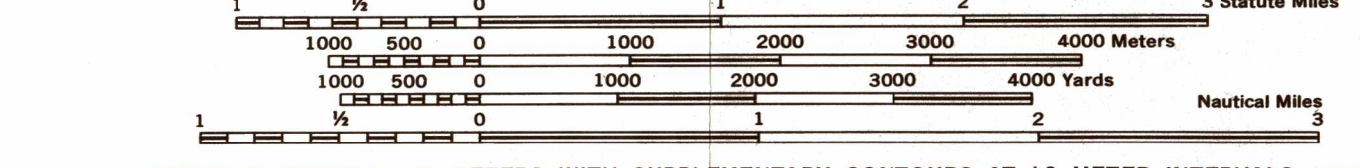

CONTOUR INTERVAL 20 METERS WITH SUPPLEMENTARY CONTOURS AT 10 METER INTERVALS
ΙΣΟΜΕΤΡΙΑΙΣ 20 ΜΕΤΡΑ ΜΕΤΑ ΒΟΗΘΗΤΙΚΟΝ ΚΑΜΥΝΙΟΝ ΙΣΟΜΕΤΡΙΑΣ 10 ΜΕΤΡΩΝ

CAUTION
THIS PRODUCT MAY NOT CONFORM TO THE HORIZONTAL ACCURACY REQUIREMENTS FOR 1:50,000 TOPOGRAPHIC LINE MAPS. EXTREME CAUTION SHOULD BE USED WHEN MAKING MEASUREMENTS.

COORDINATE CONVERSION WGS 84 TO ED 50
Date: Add 2.5" Long, Add 3.2" Lat.

GRID CONVERSION
1985
G-M ANGLE
1 1/2" (30 MILS)

BOUNDARIES
BULGARIA
SERBIA

ADJOINING SHEETS
3482 III, 3482 II, 3482 I, 3481 IV, 3481 III, 3481 II, 3481 I

ELEVATION GUIDE
Highest, High, Medium, Low

GLOSSARY-ΛΕΞΙΟΛΟΓΙΟΝ
Bila: ridge
Brida: mountain
Chuka(): peak
Cuka: peak
Dol: valley
Olava: hill
Kamen: rock
Kladenci: bridge
Manastir: monastery
Most: dam
Planina: mountain range
border patrol post
Propuski Post: border patrol post
Potok: stream
Raka: stream
Rit: peak
Roh: ridge
Voda: stream
Vrh: peak
Obina: first order administrative division

BOUNDARIES
MIRNOVODRAGAZA OBLAST
BULGARIA
SERBIA

ADJOINING SHEETS
3482 III, 3482 II, 3482 I, 3481 IV, 3481 III, 3481 II, 3481 I

ELEVATION GUIDE
Highest, High, Medium, Low

GLOSSARY-ΛΕΞΙΟΛΟΓΙΟΝ
Bila: ridge
Brida: mountain
Chuka(): peak
Cuka: peak
Dol: valley
Olava: hill
Kamen: rock
Kladenci: bridge
Manastir: monastery
Most: dam
Planina: mountain range
border patrol post
Propuski Post: border patrol post
Potok: stream
Raka: stream
Rit: peak
Roh: ridge
Voda: stream
Vrh: peak
Obina: first order administrative division