


V745, EDITION 5-AMS

Prepared by the Army Map Service (PV), Corps of Engineers, U.S. Army, Washington, D.C. Compiled in 1968 from U.S. Quadrangles, Georgia 1:24,000, U.S. Geological Survey, revised 1951. Planimetric detail revised by photogrammetric methods. Horizontal and vertical control by USCGS, Georgia Geodetic Survey and CE. This map complies with the national standard map accuracy requirements. Map not field checked.

REPRINTED BY NIMA 10/01

LEGEND
Tint indicates built-up areas in which only landmark buildings are shown
ROAD DATA 1968
In developed areas, only through roads are classified
Hard surface, heavy duty road, four or more lanes wide
Hard surface, heavy duty road, two lanes wide; three lanes wide
Hard surface, medium duty road, four or more lanes wide
Hard surface, medium duty road, two lanes wide; three lanes wide
Buildings
Mines: open pit; Horizontal shaft; Vertical shaft; Prospect
RAILROADS
Standard gauge
Narrow gauge
In street
Carline
Spot elevation in meters
Checked
Unchecked
Woods or brushwood
Orchard; Scrub


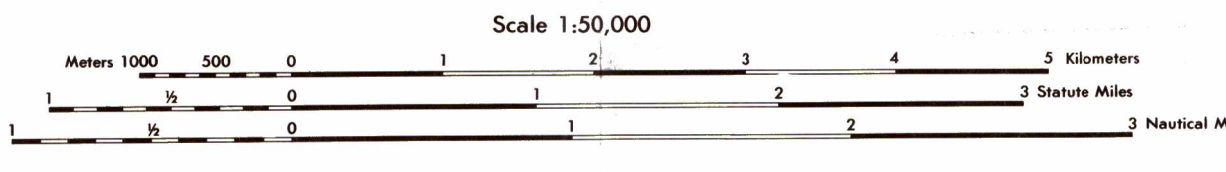


ELEVATIONS IN METERS
CONTOUR INTERVAL 5 METERS
VERTICAL DATUM: SEA LEVEL DATUM OF 1929

TRANSVERSE MERCATOR PROJECTION
HORIZONTAL DATUM: 1927 NORTH AMERICAN DATUM
HYDROGRAPHIC DATUM: MEAN LOW WATER

BLACK NUMBERED LINES INDICATE THE 1,000 METER UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 17. CLARKE 1866 SPHEROID
USERS SHOULD REFER TO CORRECTIONS, ADDITIONS, AND COMMENTS TO THE NIMA OPERATIONAL HELP DESK
1800 455-0899; COMMERICAL 314 263-4864; 108 973-4864, OR WRITE TO: DIRECTOR, NATIONAL IMAGERY AND MAPPING AGENCY, ATTN: ES, MAIL STOP 686, 4600 SANGAMORE ROAD, BETHESDA, MD 20816-5003
FOR SALE BY U. S. GEOLOGICAL SURVEY, RESTON, VIRGINIA 22092

GRID ZONE DESIGNATION: 17R
100,000 M. SQUARE IDENTIFICATION
TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 100 METERS
SAMPLE POINT: 2, FORT
1. Read letters identifying 100,000 meter square in which the point lies
2. Locate first VERTICAL grid line to LEFT of point and add LARGE figure labeling the line either to the top or bottom margin, or on the line itself
3. Estimate tenths from grid line to point
4. Locate first HORIZONTAL grid line BELOW point and add LARGE figure labeling the line either to the left or right margin, or on the line itself
5. Estimate tenths from grid line to point
SAMPLE REFERENCE: NAD 83 17R 061 905 303
If reporting beyond 99% or 10% W, or 4th Grid Zone Designation, use: 17RNF061903

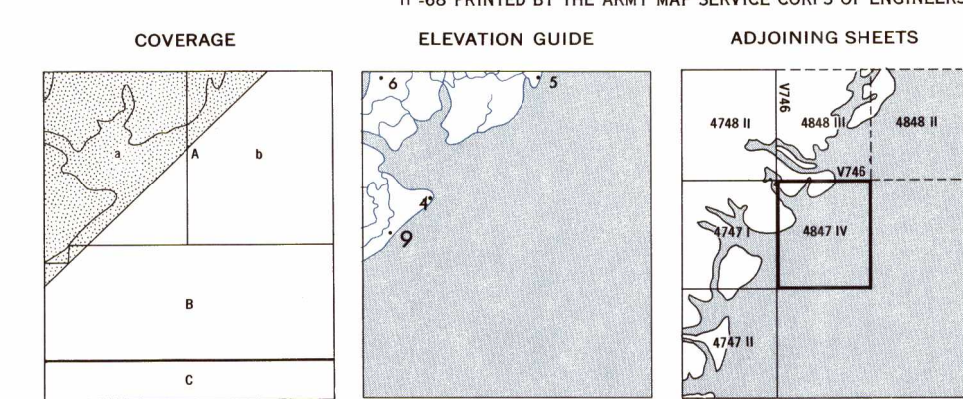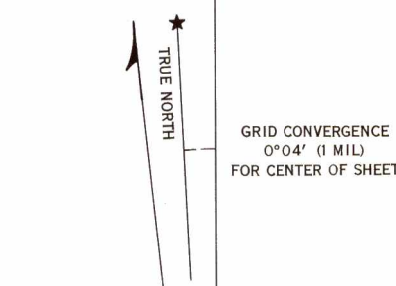

COMPILED METHODS
Photogrammetric
A. Georgia, U.S. Quadrangles, 1:24,000, USGS. (Topographic maps compiled, reliability good)
B. Wetmore Sound, 1951
C. Savannah Beach South, 1951
D. USCGS Chart 440, 1968
E. USCGS Chart 1241, 1967
Aerial photographs: April 1968.

METRIC CONVERSION OF CONTOURS AND ELEVATIONS 1:79
THIS MAP IS RED-LIGHT READABLE

WASSAW SOUND, GEORGIA

NSN 7643014043819
NIMA REF. NO. V745X48474