


V746
Edition 2-AMS
Prepared by the Army Map Service (GE), Corps of Engineers, U.S. Army, Washington, D.C. Compiled in 1964 from: North Carolina-South Carolina, USGS Quadrangles 1:24,000, 5252 III NE, 5252 III NW, 5252 III SW, and 5252 III SE 1962. Original mapping by U.S. Geological Survey. Planimetry by photogrammetric methods from aerial photographs taken 1951. Topography by planimetric surveys 1962. Horizontal and vertical control by USGS, USC&GS, and South Carolina Geodetic Survey. This map complies with national standard map accuracy requirements. Map field checked.

LEGEND

Hard surface, heavy duty road, four or more lanes wide	Improved light duty road, street
Hard surface, heavy duty road, two lanes wide, three lanes wide	Unimproved dirt road
Hard surface, medium duty road, four or more lanes wide	Trail
Hard surface, medium duty road, two lanes wide, three lanes wide	Route markers: Federal, State
Buildings	Barns, sheds, greenhouses, stadiums, etc.
RAILROADS	Bench mark, non-monumented
Standard gauge	Bench mark, monumented
Narrow gauge	Spot elevations in meters: Checked, unchecked
In street	Light, lighthouse, windmill, wind pump, water mill
Canals	Woods or brushwood
National	Vineyard, Orchard
State (with monument)	Intermittent lake
County	Permanent stream; Dam
Township	Marsh or swamp
Corporate limits	Rapids; Falls
Military reservation	Large rapids; Large falls
Other reservation	



ELEVATIONS IN METERS
CONTOUR INTERVAL 5 METERS
VERTICAL DATUM: SEA LEVEL DATUM OF 1929
TRANSVERSE MERCATOR PROJECTION
HORIZONTAL DATUM: 1927 NORTH AMERICAN DATUM
MERCATOR GRID, ZONE 17
BLACK NUMBERED LINES INDICATE THE 1,000 METER UNIVERSAL TRANSVERSE MERCATOR GRID.

GRID ZONE DESIGNATION: 17S
10,000 M. SQUARE IDENTIFICATION


PH	QH
700	

TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 100 METERS

SAMPLE POINT: RADIO TOWER

1. Read letters identifying 100,000 meter square in which the point lies.	PH
2. Locate grid VERTICAL grid line to LEFT of point and read LARGE figures labeling the line either on the top or bottom margin or on the line itself.	97
3. Locate grid HORIZONTAL grid line BELOW point and read LARGE figures labeling the line either on the left or right margin, or on the line itself.	80
4. Estimate tenths from grid line to point.	
5. If measuring beyond 10° in any direction, prefix Grid Zone Designation, 17S.	17SPK97809

IGNORE THE SMALLER figures of any grid number; these are for locating the full coordinates. Use ONLY the LARGE figures of the grid number; example: 3764000

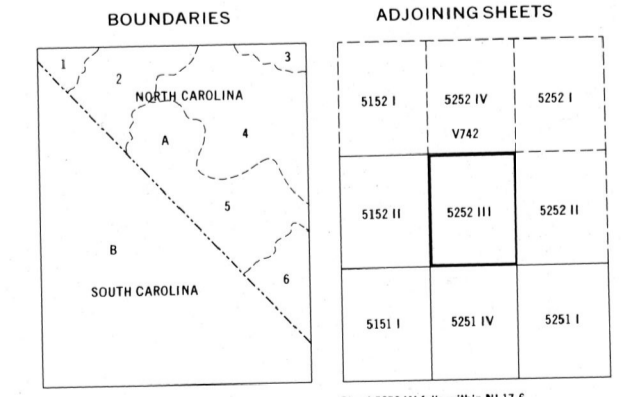

North Carolina
1. Columbia County
2. Fair Bluff Township
3. Gertie Grove Township
4. Williams Township
5. South Williams Township
6. Rag Hill Township
South Carolina
7. Barry County

Reprinted by NIMA 12-99
Sheet 5252 III falls within N 174 9901, 1:250,000
METRIC CONVERSION OF CONTOURS AND ELEVATIONS 1979
THIS MAP IS RED-LIGHT READABLE
TABOR CITY, S.C.-N.C.
FOR SALE BY U.S. GEOLOGICAL SURVEY RESTON, VIRGINIA 22092
NSN 7643014043885
NSA Ref No: V746X52523

USERS SHOULD REFER TO CORRECTIONS, ADDITIONS, AND COMMENTS TO THE NGA OPERATIONAL HELP DESK: 1-800-459-2898; COMMERCIAL 314-263-8064; OR WRITE TO: DIRECTOR, NATIONAL GEOSPATIAL-INTELLIGENCE AGENCY, ATTN: ES, MAIL STOP L-88, 4600 SANDHURST ROAD, BETHESDA, MD 20815-5003.