

Prepared and published by the Defense Mapping Agency
Topographic Center, Washington, D. C.

LEGEND

ROAD DATA 1976
OTHER INFORMATION 1973

ON THIS MAP, A LANE IS GENERALLY CONSIDERED AS BEING A MINIMUM OF 8 FEET (2.5 METERS) IN WIDTH
IN DEVELOPED AREAS, ONLY THROUGH ROADS ARE CLASSIFIED
TINT INDICATES BUILT-UP AREAS IN WHICH ONLY LANDMARK BUILDINGS ARE SHOWN

ROADS


- Divided highway with median strip
- Primary all weather, hard surface, two or more lanes wide
- Secondary all weather, hard surface, two or more lanes wide
- Light duty, all weather, hard or improved surface
- Fair or dry weather, unimproved surface
- Trail
- Route markers: Interstate, Federal, State
- RAILROADS (Standard gauge: 4'8 1/2" - 1.44 m.)
- Single track
- Multiple track, non-operating
- Railroad station: Position known; Position unknown
- Car line

BOUNDARIES

- National
- State, territory
- County, parish, municipio
- Civil township, precinct, town, barrio
- Incorporated city, village, town, hamlet
- Reservation: National, state, military
- Power transmission line

Other Symbols:

- Church, School
- Watermill
- Windmill, wind pump
- Mine, vertical shaft
- Mine, horizontal shaft
- Open pit mine or quarry, inactive
- Open pit mine or quarry, active
- Horizontal control station
- Bench mark, monumented
- Bench mark, non-monumented
- Spot elevations in feet: Checked, Unchecked
- Woodland, scrub
- Vineyard, Orchard
- Intermittent lake
- Intermittent stream, Dam
- Mark or swamp
- Rapid, Fall
- Large rapids, Large falls

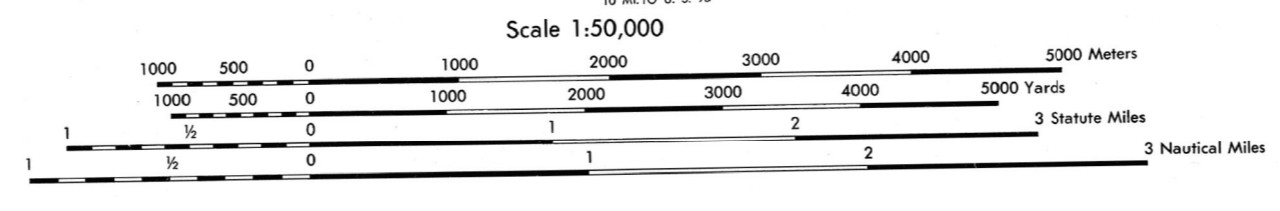

CONTOUR INTERVAL 80 FEET
SUPPLEMENTARY CONTOURS 20 AND 40 FEET

SPHEROID CLARKE 1866
GRID 1,000 METER UTM ZONE 11 (BLACK NUMBERED LINES)
PROJECTION TRANSVERSE MERCATOR
VERTICAL DATUM MEAN SEA LEVEL DATUM 1929
HORIZONTAL DATUM 1973 NORTH AMERICAN
CONTRAST BY USGS AND NOS/NOAA
PRINTED BY DEFENSE MAPPING AGENCY TOPOGRAPHIC CENTER 12-76
Reprinted by NGA 04-05

SAMPLE 1000 METER GRID SQUARE

12 13
10 11
14 15

PL

GRID ZONE DESIGNATION
11S

100 METER REFERENCE

1. Read large number labeling the VERTICAL grid line to the left of point and estimate tenths (100 meters) from grid line to point. 12 3
2. Read large number labeling the HORIZONTAL grid line below point and estimate tenths (100 meters) from grid line to point. 45 6
Example: 123456

WHEN REPORTING ACROSS A 100,000 METER LINE, PREFIX THE 100,000 METER SQUARE IDENTIFICATION, IN WHICH THE POINT LIES.
Example: PL123456

WHEN REPORTING OUTSIDE THE GRID ZONE DESIGNATION AREA, PREFIX THE GRID ZONE DESIGNATION.
Example: 11SPL123456

ELEVATION GUIDE

ADJOINING SHEETS

2857 I	2957 IV	2957 I
2857 II	2957 III	2957 II
2856 I	2956 IV	2956 I

BOUNDARIES

Clark County

USERS SHOULD REFER CORRECTIONS, ADDITIONS, AND COMMENTS TO THE NGA OPERATIONAL HELP DESK: 1-800-458-0888, COMMERCIAL 314-283-4884, DSN 883-4884, OR WRITE TO: DIRECTOR, NATIONAL GEOSPATIAL INTELLIGENCE AGENCY, ATTN: ES, MAIL STOP L-86, 4600 SANGAMORE ROAD, BETHESDA, MD 20816-9003.

1975 G-M ANGLE 14° (250 METERS)

GRID CONVERGENCE 0'58" (17 METERS) FOR CENTER OF SHEET

TO CONVERT A GRID AZIMUTH TO A MAGNETIC AZIMUTH
SUBTRACT G-M ANGLE

TO CONVERT A MAGNETIC AZIMUTH TO A GRID AZIMUTH
ADD G-M ANGLE

NSN 7643014044683
NGA Ref No: V796X29573

ED. NO. 001