


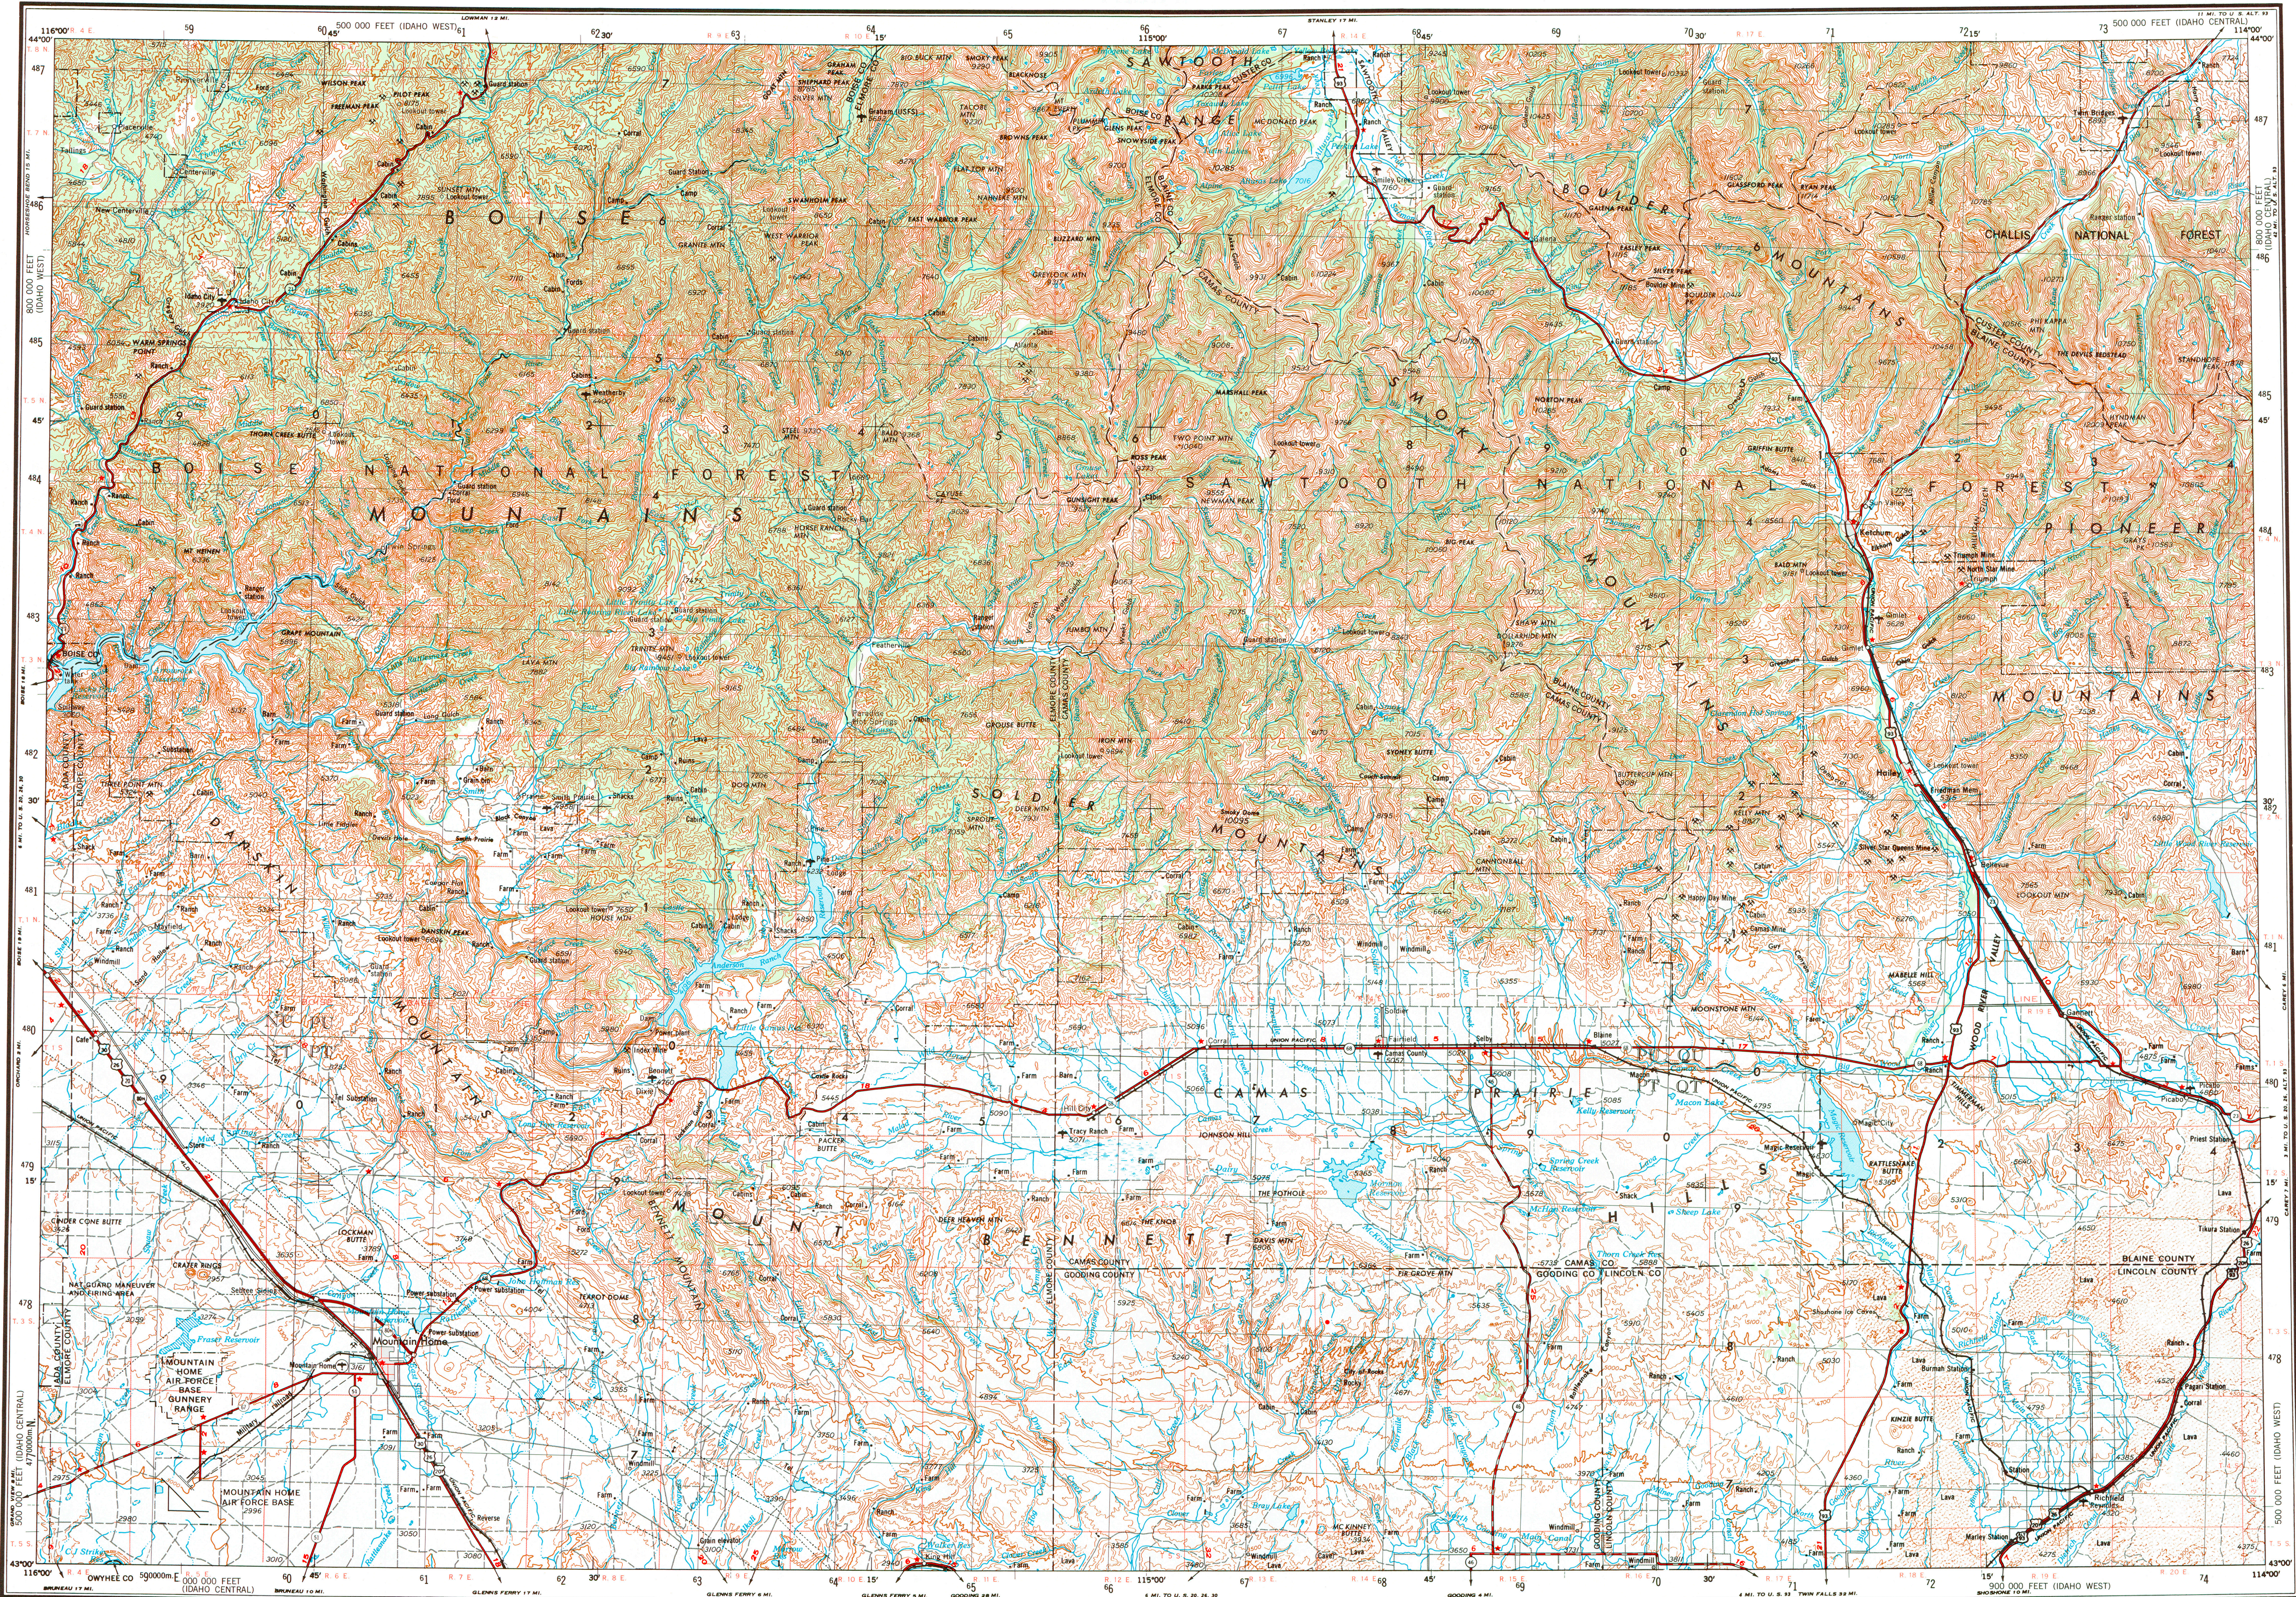

Prepared by the U. S. Army Topographic Command (ASPM), Washington, D.C. Compiled in 1956 by photogrammetric methods from aerial photographs taken 1954. Photographs field annotated 1955. Revised by the U. S. Geological Survey 1970

Transverse Mercator Projection. 10,000-meter Universal Transverse Mercator grid, zone 11. 100,000-foot grid ticks based on Idaho coordinate system, central and west zones. 1927 North American Datum. To place on the predicted North American Datum 1983, move the projection lines 14 meters north and 74 meters east.

Location of geodetic control established by government agencies is shown on corresponding 1:250,000-scale Geodetic Control Diagram

There may be private inholdings within the boundaries of the National or State reservations shown on this map

LEGEND

Figures in red denote approximate distances in miles between stars

POPULATED PLACES

Over 500,000
100,000 to 500,000
25,000 to 100,000
5,000 to 25,000
1,000 to 5,000
Less than 1,000

ROADS

Primary, all-weather, hard surface
Secondary, all-weather, hard surface
Light-duty, all-weather, improved surface
Fair or dry weather, unimproved surface
Trail

RAILROADS

Standard gauge
Narrow gauge
Interurban
State
County
Park or reservation

BOUNDARIES

International
State
County

Landplane airport
Landing area
Dry lake
Orchard
Woods brushwood

Route markers: Interstate, U.S., State
Interchange

Landmark: School, Church, Other, etc.
Spot elevation in feet
Marsh or swamp
Intermittent or dry stream
Power line

Scale 1:250,000

20 Statute Miles
30 Kilometers
15 Nautical Miles

CONTOUR INTERVAL 200 FEET
WITH SUPPLEMENTARY CONTOURS AT 100 FOOT INTERVALS

1970 MAGNETIC DECLINATION FROM TRUE NORTH VARIES FROM 18m° (330 MILES) EASTERLY FOR THE CENTER OF THE WEST EDGE TO 18° (320 MILES) EASTERLY FOR THE CENTER OF THE EAST EDGE

FOR SALE BY U.S. GEOLOGICAL SURVEY, DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092

LOCATION DIAGRAM

46° 12' 0" N
46° 0' 0" N
45° 48' 0" N
45° 36' 0" N
45° 24' 0" N
45° 12' 0" N
45° 0' 0" N
44° 48' 0" N
44° 36' 0" N
44° 24' 0" N
44° 12' 0" N
44° 0' 0" N

110° 0' 0" W
110° 12' 0" W
110° 24' 0" W
110° 36' 0" W
110° 48' 0" W
111° 0' 0" W
111° 12' 0" W
111° 24' 0" W
111° 36' 0" W
111° 48' 0" W
112° 0' 0" W

SECTIONIZED TOWNSHIP

6	5	4	3	2	1
7	8	9	10	11	12
13	14	15	16	17	18
19	20	21	22	23	24
25	26	27	28	29	30
31	32	33	34	35	36

GRID ZONE DESIGNATION: 11T
100,000 M. SQUARE IDENTIFICATION: 11T
SAMPLE POINT: 11T
TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 100 METERS

1. Read letters identifying 100,000 meter square in which the point lies.
2. Locate first VERTICAL grid line to LEFT of point and read LARGE figure labeling the line either in the top or bottom margin, or on the line itself.
3. Estimate tenths from grid line to point.
4. Locate first HORIZONTAL grid line BELOW point and read LARGE figure labeling the line either in the left or right margin, or on the line itself.
5. Estimate tenths from grid line to point.

SAMPLE REFERENCE: 11T0356
If reading beyond 10" in any direction, prefix Grid Zone Designation: 11T